LOC/DME I-BIS	APP CRS	Rwy Ldg	8794
110.3	311°	TDZE	1645
Chan 40		Apt Elev	1661

ILS or LOC RWY 31

BISMARCK MUNI (BIS)

DME required for procedure entry.


ASR

Autopilot coupled approach NA below 2680.
For inop ALS, increase S-LOC 31 OFTEN FIX Cat C/D minimums visibility to RVR 5500.


MALSR

MISSED APPROACH: Climb to 2800 then climbing right turn to 3600 direct BIS VOR/DME and hold.


ATIS	BISMARCK APP CON★	BISMARCK TOWER★	GND CON	UNICOM
119.35	126.3 298.9	118.3 (CTAF) L 257.8	121.9	122.95

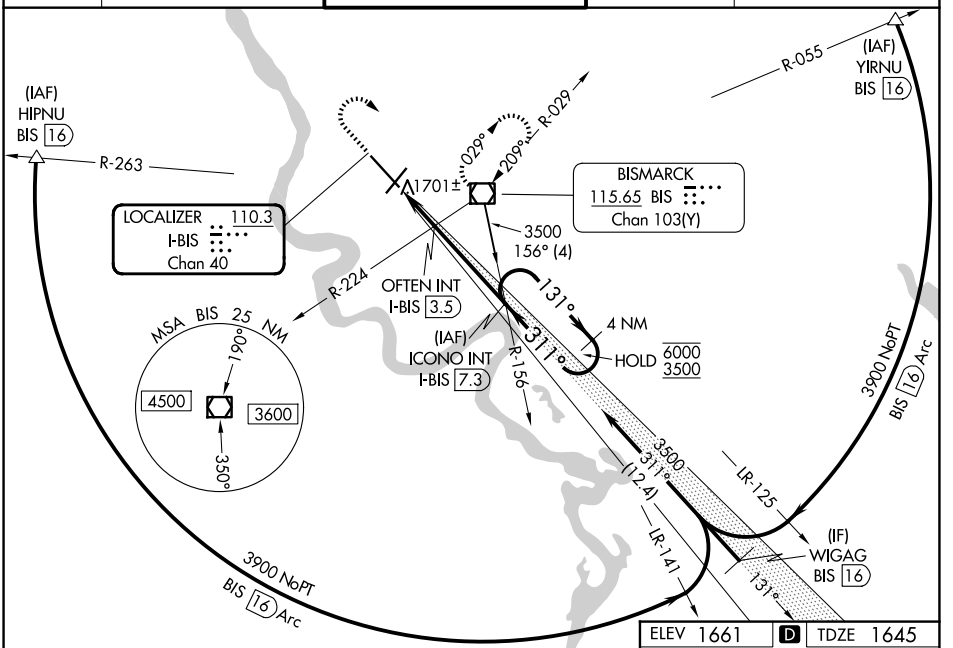

ELEV 1661 D TDZE 1645

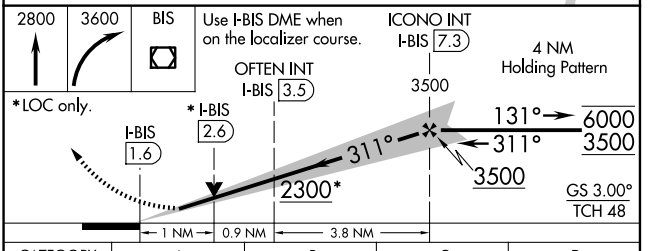

CATEGORY	A	B	C	D
S-ILS 31	1845/24 200 (200-½)			
S-LOC 31	2300/24 655 (700-½)		2300-1⅜ 655 (700-1⅜)	
CIRCLING	2300-1 639 (700-1)		2460-2¼ 799 (800-2¼)	2460-2½ 799 (800-2½)
OFTEN FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED)				
S-LOC 31	2020/24 375 (400-½)		2020/35 375 (400-⅝)	
CIRCLING	2240-1 579 (600-1)		2460-2¼ 799 (800-2¼)	2460-2½ 799 (800-2½)

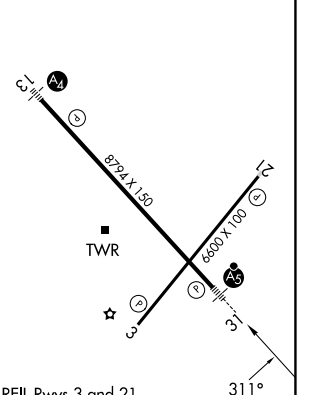

REIL Rwys 3 and 21
HIRL Rwys 3-21 and 13-31

FAF to MAP 5.7 NM

Knots	60	90	120	150	180
Min:Sec	5:42	3:48	2:51	2:17	1:54

NC-1, 29 OCT 2026 to 26 NOV 2026
NC-1, 29 OCT 2026 to 26 NOV 2026