APP CRS	Rwy Ldg	7569
235°	TDZE	726
	Apt Elev	727

RNAV (RNP) Z RWY 23

BUFFALO NIAGARA INTL (BUF)

RNP AR APCH.

For uncompensated Baro-VNAV systems, procedure NA below -18°C or above 54°C. For inop ALSF, increase RNP 0.10 all Cats visibility to 1¼. For inop ALSF, increase RNP 0.20 all Cats visibility to 1½. For inop ALSF, increase RNP 0.30 all Cats visibility to 1¾ .

ALSF-2

MISSED APPROACH: Climb to 3000 on the RNAV missed approach route to WABUS and hold.

D-ATIS	BUFFALO APP CON	BUFFALO TOWER	GND CON
135.35	126.15 263.125	120.5 257.8	133.2 257.8

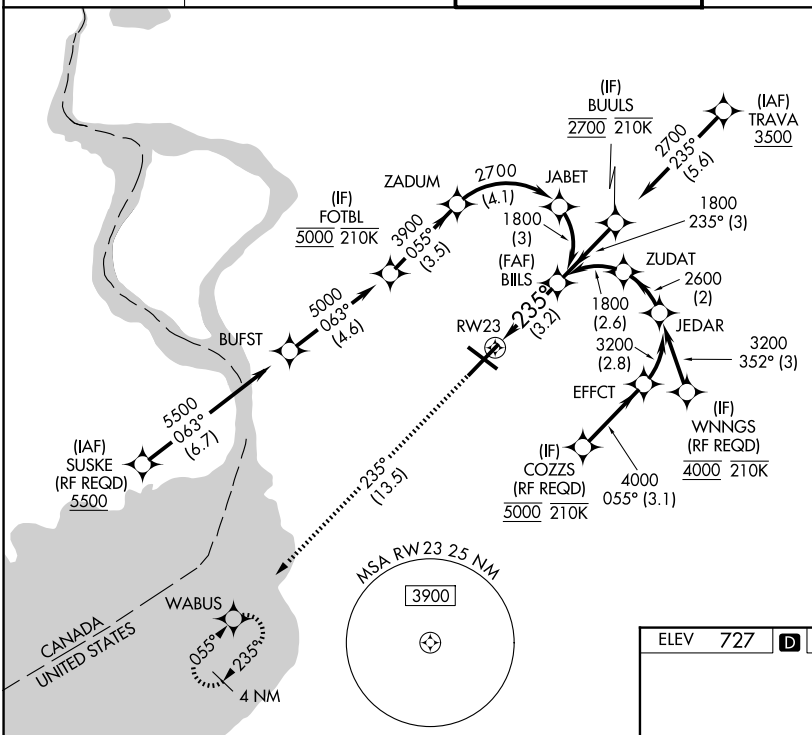

3000 ↑ tr 235	WABUS	See planview for multiple IF locations.

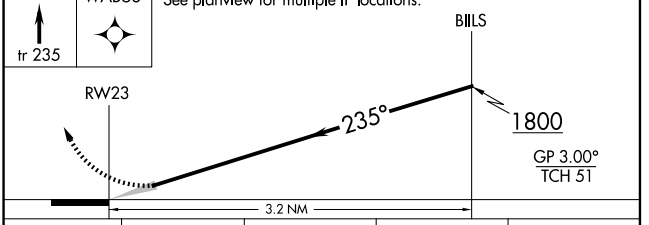

CATEGORY	A	B	C	D
RNP 0.10 DA	1114/45 388 (400-⅞)			
RNP 0.20 DA	1170/55 444 (500-1)			
RNP 0.30 DA	1228-1¼ 502 (600-1¼)			

AUTHORIZATION REQUIRED

ELEV 727 D TDZE 726

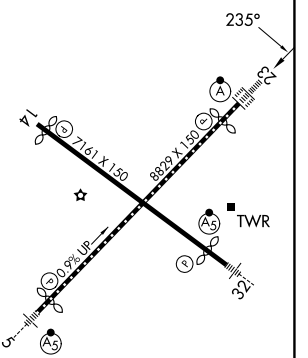

REIL Rwy 14
TDZL/RCLS Rwys 5 and 23
HIRL Rwys 5-23 and 14-32

NE-2, 29 OCT 2026 to 26 NOV 2026