LOC I-IWA	APP CRS	Rwy Ldg	10201
110.15	303°	TDZE	1380
		Apt Elev	1384


ILS or LOC RWY 30C


MESA GATEWAY (IWA)

When local altimeter setting not received, use Phoenix Sky Harbor Intl altimeter setting and increase S-ILS DA to 1660 feet and all MDA 80 feet, increase S-ILS 30C, S-LOC 30C all Cats and Circling Cats C/D/E visibility ¼ SM.

MISSED APPROACH: Climb to 2800 then climbing right turn to 5000 via heading 145° and IWA VORTAC R-015 to IWA VORTAC and hold, continue climb-in-hold to 5000 (TACAN aircraft continue via IWA VORTAC R-122 to HALLB/9.9 DME and hold, continue climb-in-hold to 5000, hold SE, LT, 302° inbound).


ATIS	PHOENIX APP CON	GATEWAY TOWER★	GND CON
133.5 270.275	124.9 353.8	120.6 (CTAF) 289.4	128.25 275.8

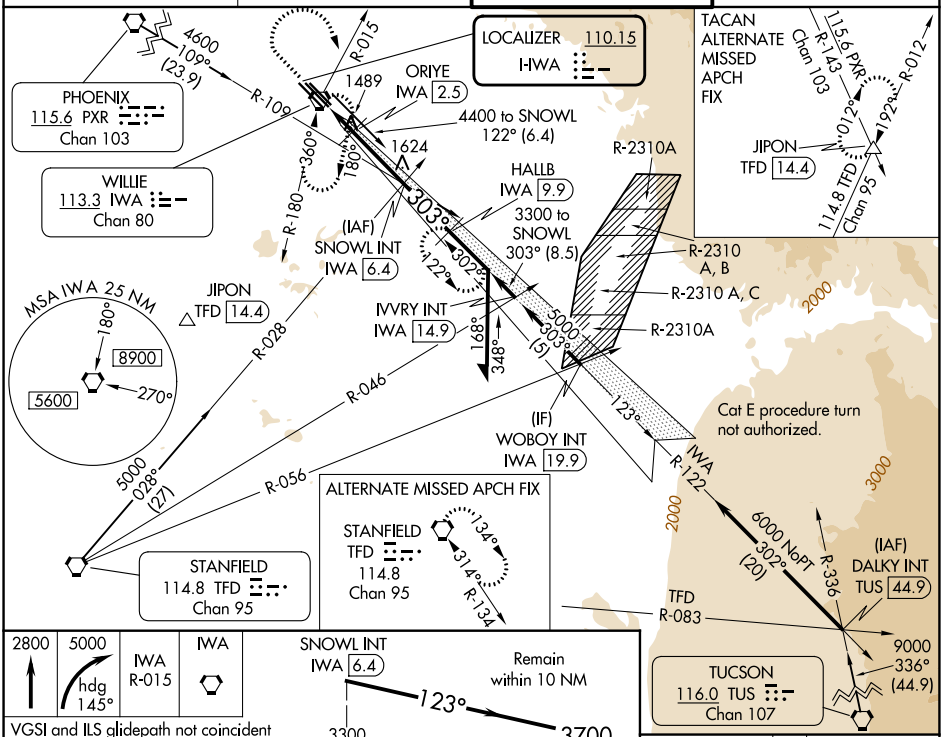

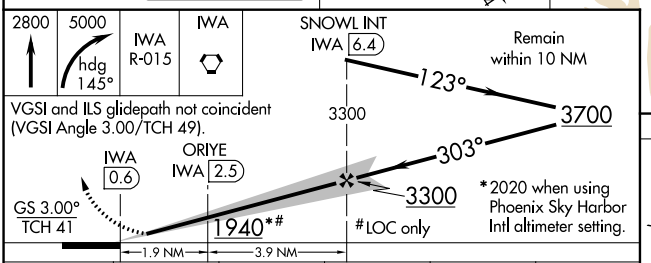

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 49).

CATEGORY	A	B	C	D	E
S-ILS 30C	1580-¾ 200 (200-¾)				
S-LOC 30C	1940-1 560 (600-1)		1940-1½ 560 (600-1½)	1940-1¾ 560 (600-1¾)	1940-2 560 (600-2)
CIRCLING	1940-1 556 (600-1)		1940-1½ 556 (600-1½)	2000-2 616 (700-2)	2020-2¼ 636 (700-2¼)
ORIYE FIX MINIMUMS					
S-LOC 30C	1800-1 420 (500-1)		1800-1¼ 420 (500-1¼)		1800-1½ 420 (500-1½)
CIRCLING	1880-1 496 (500-1)		1880-1½ 496 (500-1½)	2000-2 616 (700-2)	2020-2¼ 636 (700-2¼)



FAF to MAP 5.8 NM

Knots	60	90	120	150	180
Min:Sec	5:48	3:52	2:54	2:19	1:56

SW-4, 29 OCT 2026 to 26 NOV 2026