VOR or TACAN RWY 30C


MESA GATEWAY (IWA)

VORTAC IWA	APP CRS		30C	30R
113.3	302°	Rwy Ldg	10201	9301
Chan 80		TDZE	1380	1382
		Apt Elev	1384	1384


When local altimeter setting not received, use Phoenix Sky Harbor Intl altimeter setting and increase all MDA 80 feet, increase S-30C, SIDESTEP 30R, and Circling Cats C/D/E visibility ¼ SM.

MISSED APPROACH: Climb to 2800 then climbing right turn to 5000 via heading 145° and IWA VORTAC R-015 to IWA VORTAC and hold, continue climb-in-hold to 5000 (TACAN aircraft continue via IWA VORTAC R-122 to HALLB INT/IWA 9.9 DME and hold, continue climb-in-hold to 5000, hold SE, LT, 302° inbound).

ATIS	PHOENIX APP CON	GATEWAY TOWER★	GND CON
133.5 270.275	124.9 353.8	120.6 (CTAF) 289.4	128.25 275.8

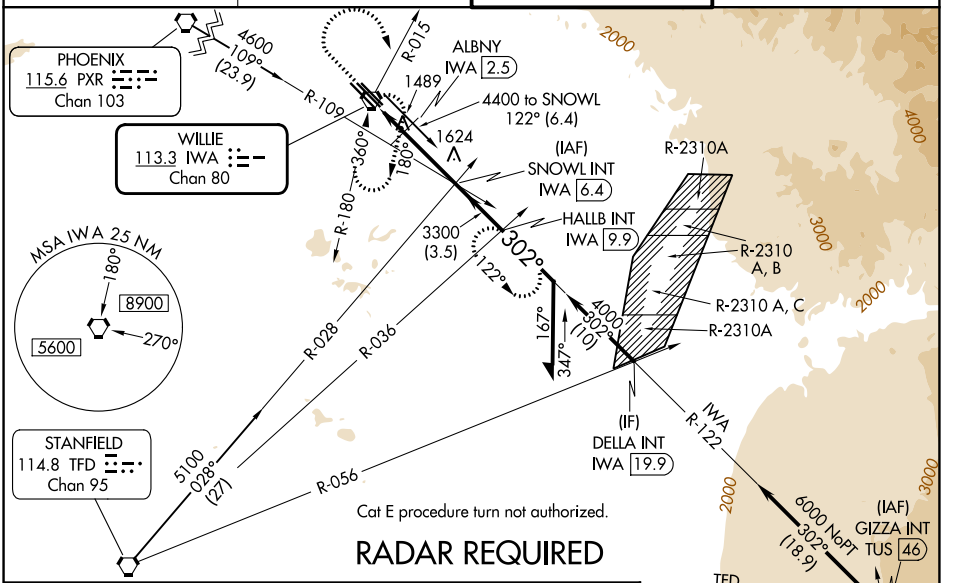


RADAR REQUIRED

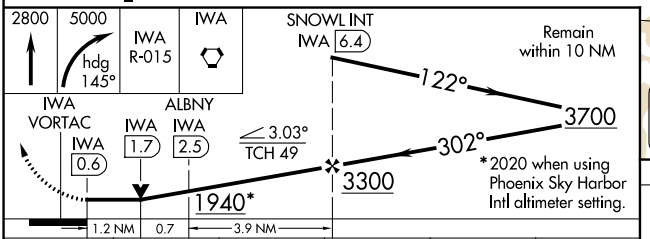

CATEGORY	A	B	C	D	E
S-30C	1940-1 560 (600-1)		1940-1½ 560 (600-1½)	1940-1¾ 560 (600-1¾)	1940-2 560 (600-2)
SIDESTEP 30R	1940-1 558 (600-1)		1940-1½ 558 (600-1½)	1940-2 558 (600-2)	
CIRCLING	1940-1 556 (600-1)		1940-1½ 556 (600-1½)	2000-2 616 (700-2)	2020-2¼ 636 (700-2¼)
DME MINIMUMS					
S-30C	1800-1 420 (500-1)		1800-1¼ 420 (500-1¼)		1800-1½ 420 (500-1½)
SIDESTEP 30R	1800-1 418 (500-1)		1800-1½ 418 (500-1½)	1800-2 418 (500-2)	
CIRCLING	1880-1 496 (500-1)		1880-1½ 496 (500-1½)	2000-2 616 (700-2)	2020-2¼ 636 (700-2¼)

ELEV 1384 D TDZE 30C 1380
TDZE 30R 1382

HIRL Rwys 12L-30R and 12C-30C
REIL Rwys 12L and 30R
MIRL Rwy 12R-30L



FAF to MAP 5.8 NM

Knots	60	90	120	150	180
Min:Sec	5:48	3:52	2:54	2:19	1:56

SW-4, 29 OCT 2026 to 26 NOV 2026
SW-4, 29 OCT 2026 to 26 NOV 2026