ILS or LOC RWY 15

CHARLESTON AFB/INTL (CHS)

LOC I-CHS	APP CRS	Rwy Ldg	9001
109.7	154°	TDZE	43
		Apt Elev	46


DME required.


For inop ALS, increase S-ILS 15 Cat E visibility to RVR 4000 and S-LOC 15 Cats C/D/E visibility to RVR 5500. DME from CHS VORTAC. Simultaneous reception of I-CHS and CHS DME required.


ALSF-2

MISSED APPROACH: Climb to 500 then climbing left turn to 3500 on CHS VORTAC R-055 to WANDO/CHS VORTAC 13 DME/RADAR and hold, continue climb-in-hold to 3500.

D-ATIS	CHARLESTON APP CON	CHARLESTON TOWER	GND CON
124.75	120.7 306.925	126.0 239.0	121.9 348.6

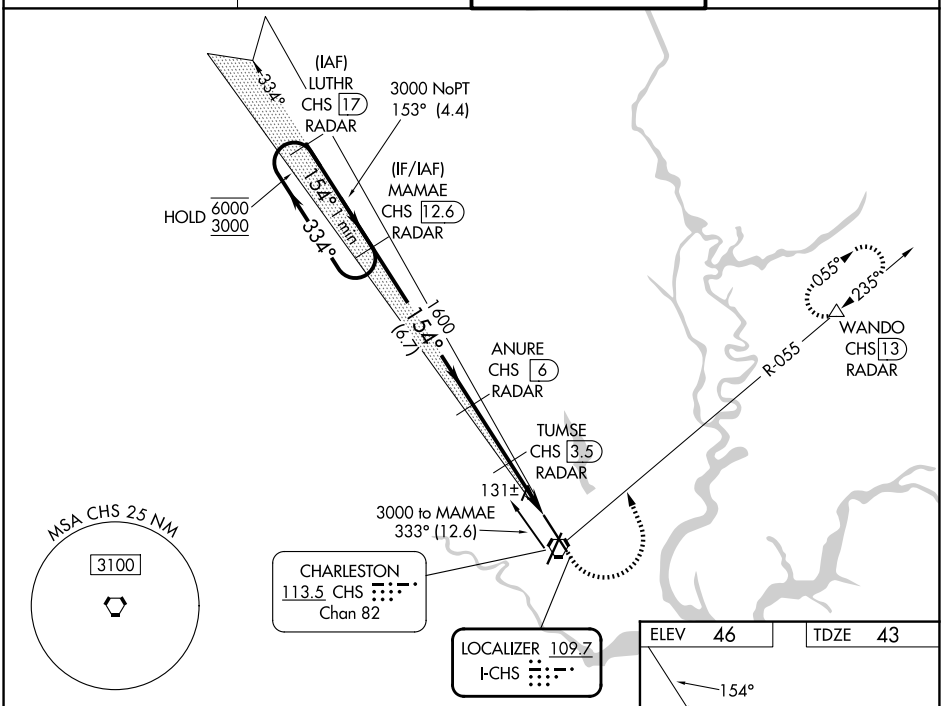

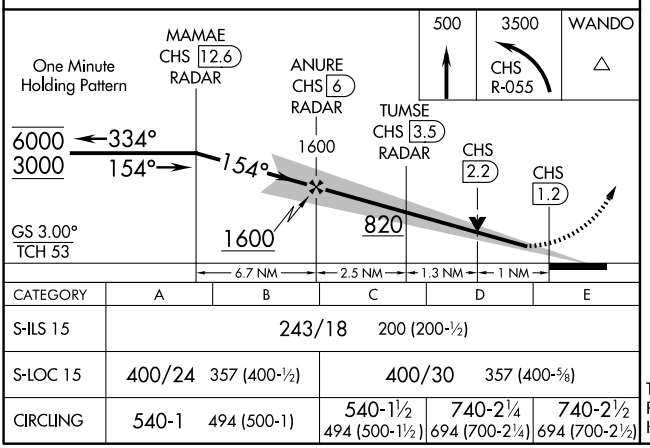

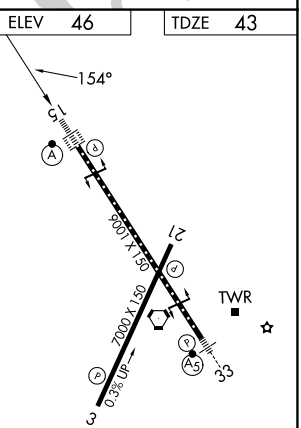

CATEGORY	A	B	C	D	E
S-ILS 15	243/18 200 (200-½)				
S-LOC 15	400/24 357 (400-½)		400/30 357 (400-⅝)		
CIRCLING	540-1 494 (500-1)		540-1½ 494 (500-1½)	740-2¼ 694 (700-2¼)	740-2½ 694 (700-2½)

TDZL/RCLS Rwy 15
REIL Rwys 3 and 21
HIRL Rwys 3-21 and 15-33

SE-2, 29 OCT 2026 to 26 NOV 2026
SE-2, 29 OCT 2026 to 26 NOV 2026