RNAV (RNP) Z RWY 15

CHARLESTON AFB/INTL (CHS)

APP CRS	Rwy Ldg	9001
154°	TDZE	43
	Apt Elev	46


RNP AR APCH - GPS. Authorization required. From JCEEE or WEKNG: RF.


For uncompensated Baro-VNAV systems, procedure NA below -4°C or above 54°C. For inop ALS, increase RNP 0.11 all Cats visibility to RVR 4500.

ALSF-2

MISSED APPROACH: Climb to 3000 on track 154° to SHRMP and hold.


D-ATIS	CHARLESTON APP CON	CHARLESTON TOWER	GND CON
124.75	120.7 306.925	126.0 239.0	121.9 348.6

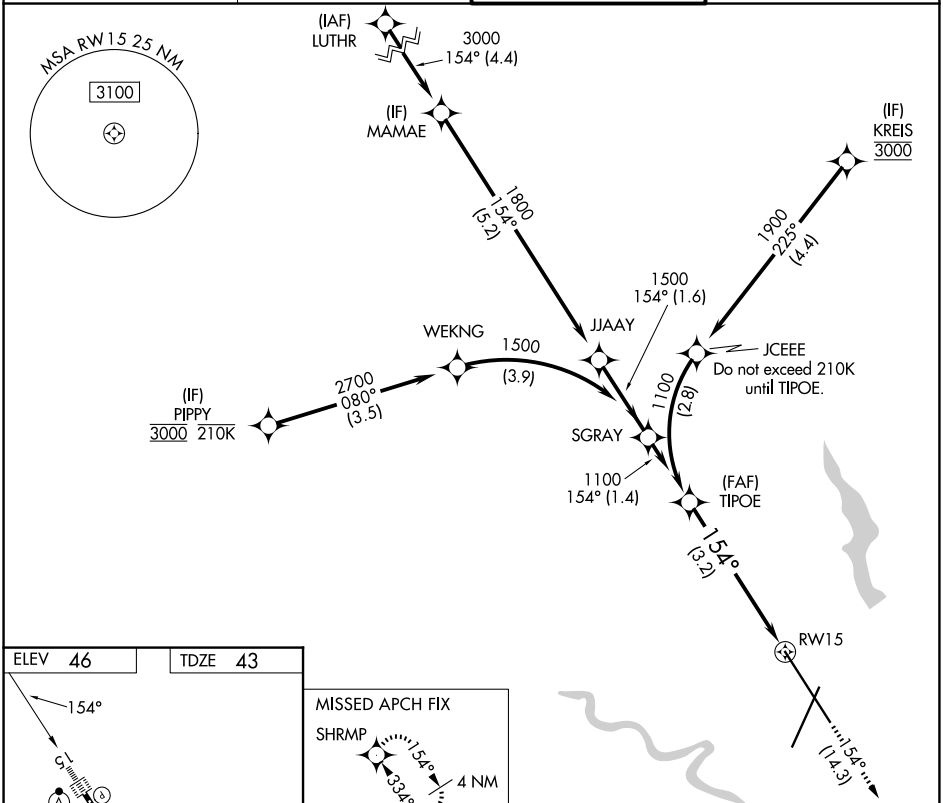

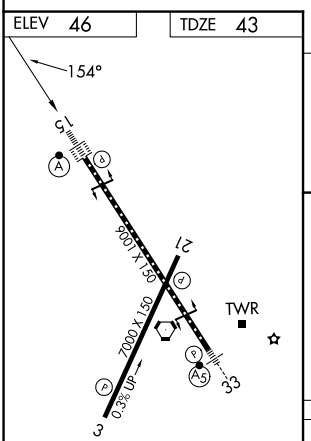

TDZL/RCLS Rwy 15
REIL Rwys 3 and 21
HIRL Rwys 3-21 and 15-33

MISSED APCH FIX

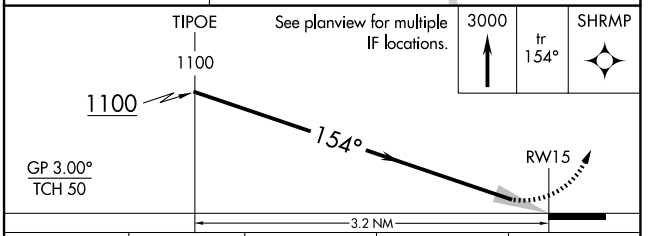

CATEGORY	A	B	C	D
RNP 0.11 DA		334/24	291 (300-½)	
RNP 0.30 DA		428/35	385 (400-⅝)	

AUTHORIZATION REQUIRED

SE-2, 29 OCT 2026 to 26 NOV 2026
SE-2, 29 OCT 2026 to 26 NOV 2026