RNAV (GPS) Y RWY 15

CHARLESTON AFB/INTL (CHS)

WAAS CH 93519 W15A	APP CRS 154°	Rwy Ldg 9001 / TDZE 43 / Apt Elev 46


RNP APCH - GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -4°C or above 54°C. For inop ALS, increase LNAV Cat C/D visibility to RVR 6000.

ALSF-2


MISSED APPROACH: Climb to 3000 direct SHRMP and hold.

D-ATIS	CHARLESTON APP CON	CHARLESTON TOWER	GND CON
124.75	120.7 306.925	126.0 239.0	121.9 348.6

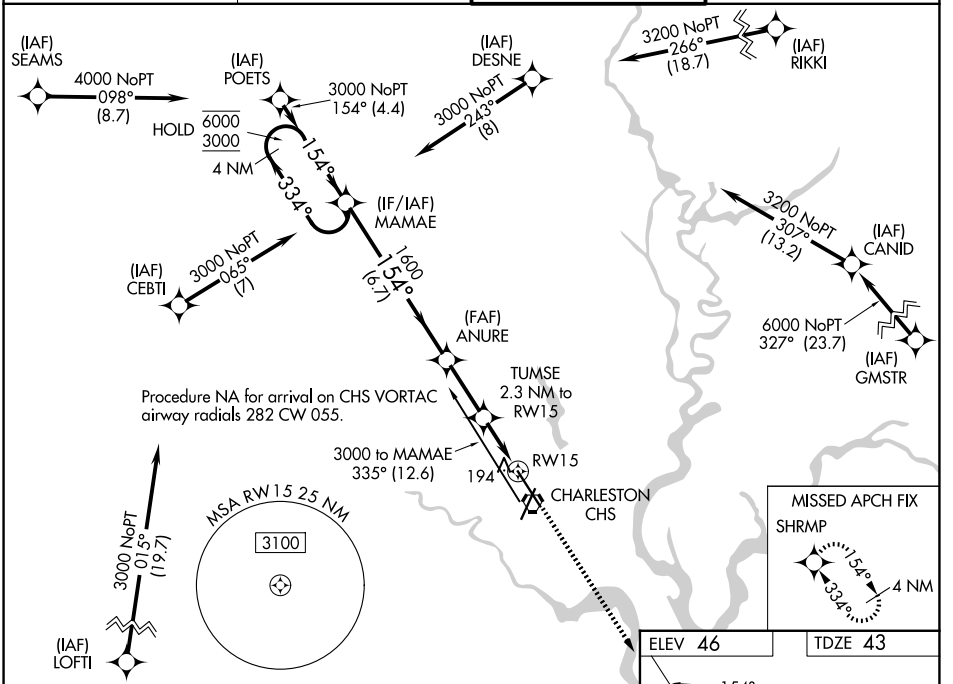

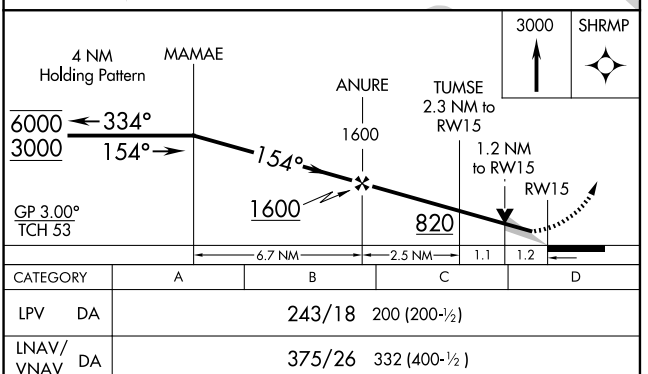

CATEGORY	A	B	C	D
LPV DA	243/18 200 (200-½)			
LNAV/VNAV DA	375/26 332 (400-½)			
LNAV MDA	460/24 417 (500-½)		460/40 417 (500-¾)	
CIRCLING	540-1 494 (500-1)		540-1½ 494 (500-1½)	740-2¼ 694 (700-2¼)

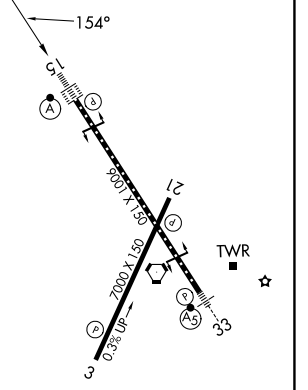

TDZL/RCLS Rwy 15
REIL Rwys 3 and 21
HIRL Rwys 3-21 and 15-33

SE-2, 29 OCT 2026 to 26 NOV 2026
SE-2, 29 OCT 2026 to 26 NOV 2026