RNAV (GPS) RWY 27

CHEYENNE RGNL/JERRY OLSON FLD (CYS)

WAAS	APP CRS	Rwy Ldg	7985
CH 70307	265°	TDZE	6121
W27A		Apt Elev	6160


RNP APCH.

T A ASR/PAR — For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -24°C or above 45°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4000.
RVR 1800 authorized with use of FD or AP or HUD to DA.


MALSR (A5)


MISSED APPROACH: Climb to 6600, then climbing right turn to 10400 direct SENSE and hold, continue climb-in-hold to 10400.

ATIS	CHEYENNE APP CON★	CHEYENNE TOWER★	GND CON	UNICOM
134.425 278.3	124.55 263.075	118.7 (CTAF) L 257.8	121.9 254.275	122.95

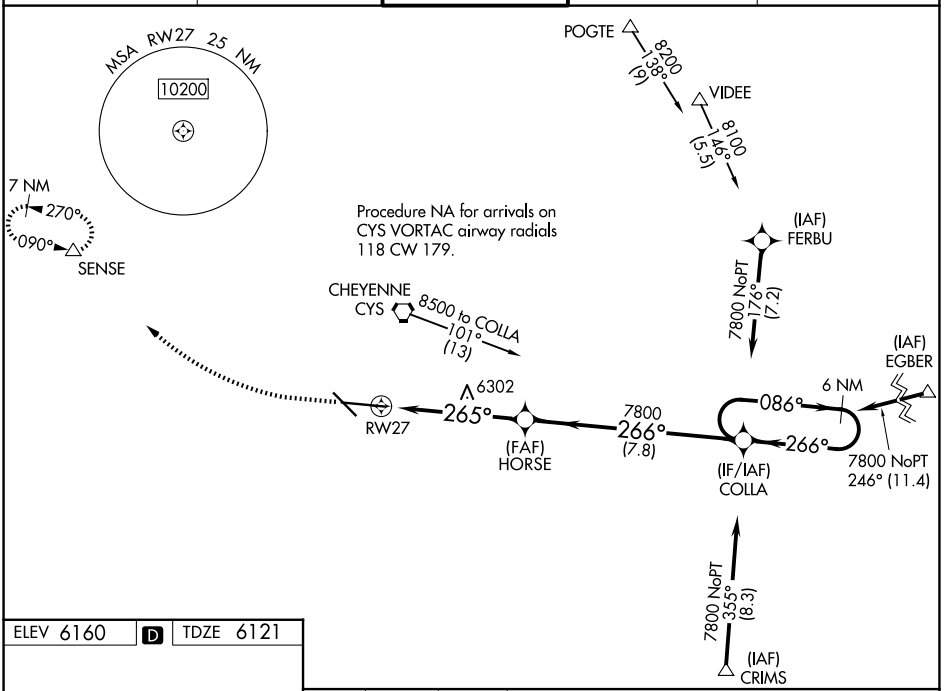

ELEV 6160 D TDZE 6121



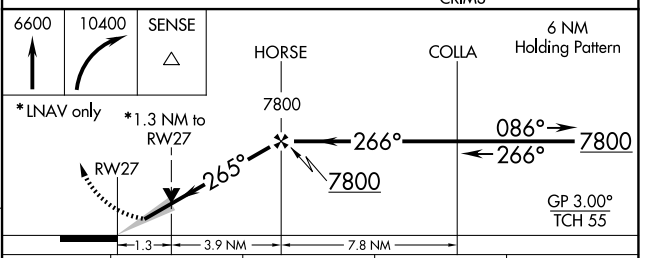

CATEGORY	A	B	C	D
LPV DA#	6321/24 200 (200-½)			
LNAV/VNAV DA	6376/24 255 (300-½)			
LNAV MDA	6560/24 439 (400-½)		6560/40 439 (400-¾)	
CIRCLING	6640-1 480 (500-1)		6900-2 740 (800-2)	6920-2½ 760 (800-2½)

REIL Rwys 9, 13 and 31 L
HIRL Rwy 9-27 L
MIRL Rwy 13-31 L

NW-1, 29 OCT 2026 to 26 NOV 2026
NW-1, 29 OCT 2026 to 26 NOV 2026