ILS or LOC RWY 4R

CHICAGO MIDWAY INTL (MDW)


LOC/DME I-HKH	APP CRS	Rwy Ldg	5927
111.5	047°	TDZE	619
Chan 52		Apt Elev	620

DME required for LOC only.
RNP APCH - GPS or RADAR required for procedure entry.

Rwy 4R helicopter visibility reduction below RVR 4000 NA.

MISSED APPROACH: Climb to 1100 then climbing right turn to 2100 on heading 230° and on EON VORTAC R-001 until crossing IGECY INT/EON 20 DME then climb to 2600 to EON VORTAC and hold.

D-ATIS	CHICAGO APP CON	MIDWAY TOWER	GND CON
132.75	128.2 353.875	135.2 269.125	118.075

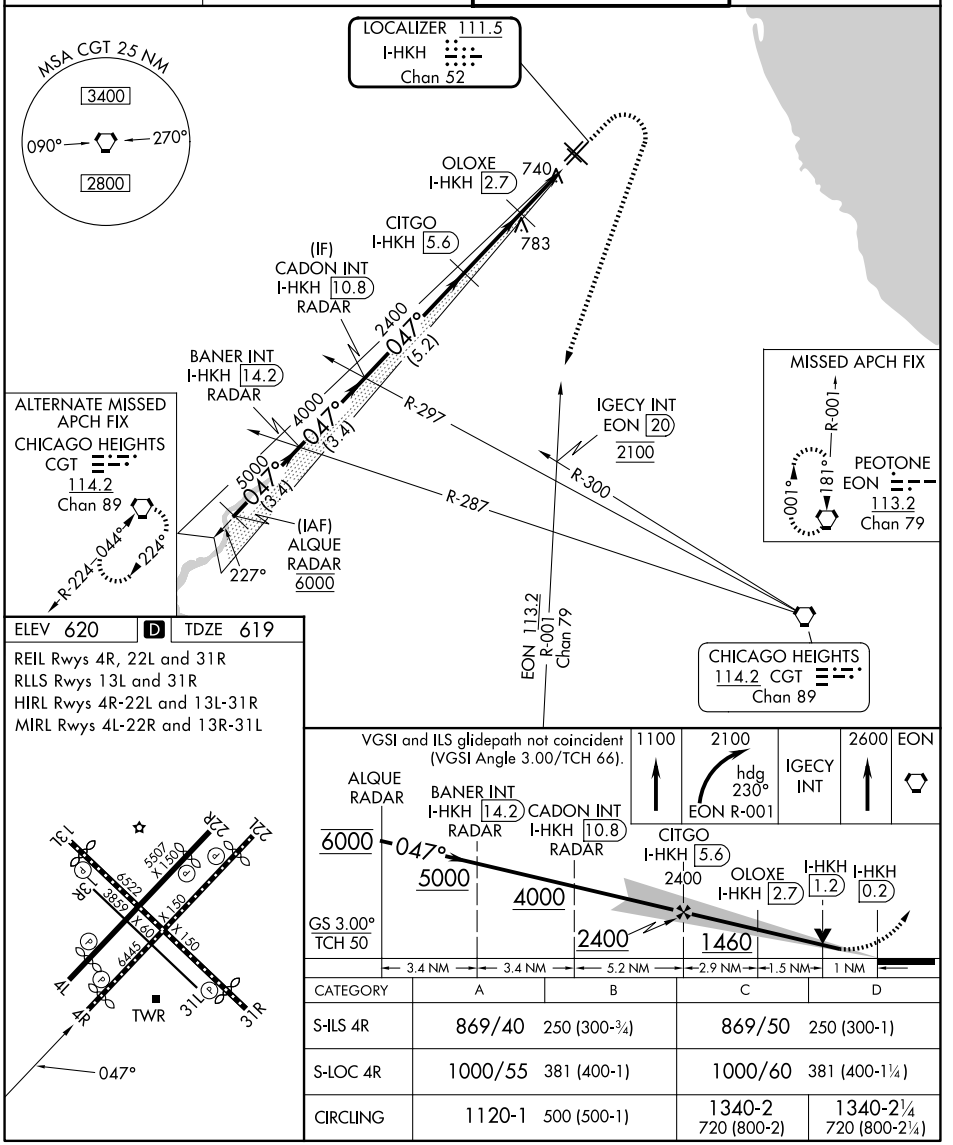

ELEV 620	D	TDZE 619

REIL Rwys 4R, 22L and 31R
RLLS Rwys 13L and 31R
HIRL Rwys 4R-22L and 13L-31R
MIRL Rwys 4L-22R and 13R-31L

CATEGORY	A	B	C	D
S-ILS 4R	869/40	250 (300-¾)	869/50	250 (300-1)
S-LOC 4R	1000/55	381 (400-1)	1000/60	381 (400-1¼)
CIRCLING	1120-1	500 (500-1)	1340-2 720 (800-2)	1340-2¼ 720 (800-2¼)

EC-3, 29 OCT 2026 to 26 NOV 2026
EC-3, 29 OCT 2026 to 26 NOV 2026