RNAV (RNP) Y RWY 4R

CHICAGO MIDWAY INTL (MDW)


APP CRS	Rwy Ldg	5927
047°	TDZE	619
	Apt Elev	620

RNP AR APCH - GPS.

For uncompensated Baro-VNAV systems, procedure NA below -20°C or above 54°C.

MISSED APPROACH: Climb to 1100 then climbing right turn to 2600 direct EON VORTAC and hold.

D-ATIS	CHICAGO APP CON	MIDWAY TOWER	GND CON
132.75	128.2 353.875	135.2 269.125	118.075

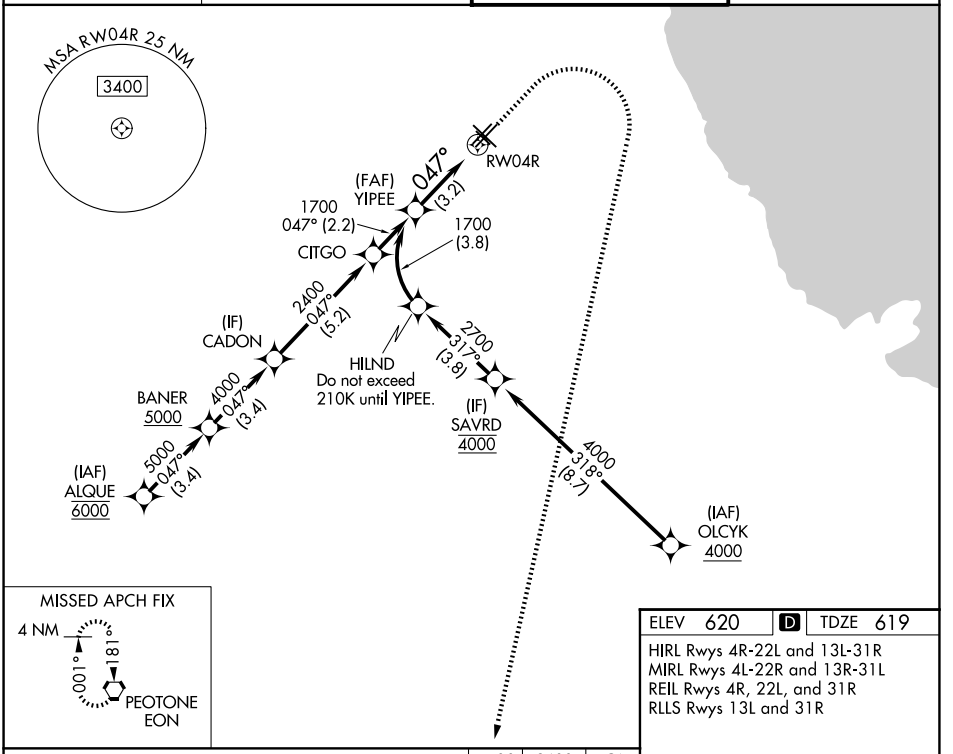



ELEV 620	D	TDZE 619

HIRL Rwys 4R-22L and 13L-31R
MIRL Rwys 4L-22R and 13R-31L
REIL Rwys 4R, 22L, and 31R
RLLS Rwys 13L and 31R

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 66).

1100	2600	EON

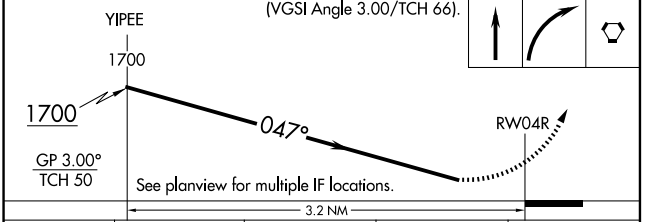



CATEGORY	A	B	C	D
RNP 0.10 DA		951/50	332 (400-1)	
RNP 0.20 DA		1020/60	401 (400-1¼)	
RNP 0.30 DA		1077-1⅜	458 (500-1⅜)	

AUTHORIZATION REQUIRED

EC-3, 29 OCT 2026 to 26 NOV 2026
EC-3, 29 OCT 2026 to 26 NOV 2026