RNAV (GPS) Z RWY 13L

CHICAGO MIDWAY INTL (MDW)


WAAS	APP CRS	Rwy Ldg	6059
CH 65847	138°	TDZE	611
W13A		Apt Elev	620


RNP APCH - GPS.

Rwy 13L helicopter visibility reduction below RVR 4000 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C.

MISSED APPROACH: Climb to 1100 then climbing right turn to 2600 direct EON VORTAC and hold.


D-ATIS	CHICAGO APP CON	MIDWAY TOWER	GND CON
132.75	128.2 353.875	135.2 269.125	118.075

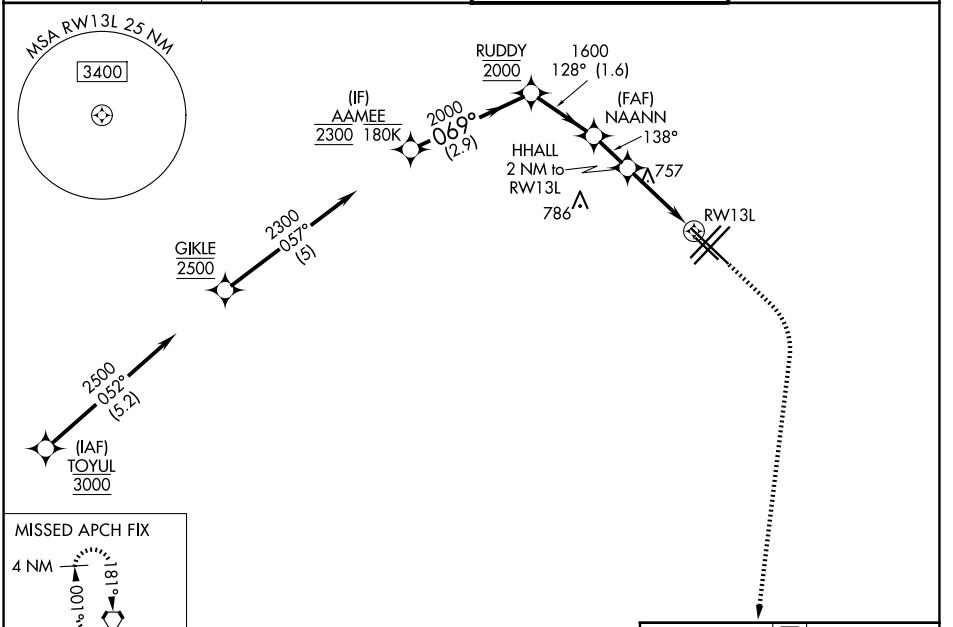

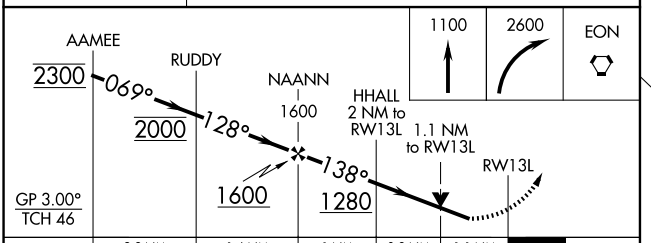

CATEGORY	A	B	C	D
LPV DA	861/40 250 (300-¾)			
LNAV\ VNAV DA	1034-1¼ 423 (500-1¼)			
LNAV MDA	1020/55 409 (400-1)		1020/60 409 (400-1¼)	
CIRCLING	1120-1 500 (500-1)		1340-2 720 (800-2)	1340-2¼ 720 (800-2¼)

ELEV 620 D TDZE 611



REIL Rwys 4R, 22L and 31R
RLLS Rwys 13L and 31R
HIRL Rwys 4R-22L and 13L-31R
MIRL Rwys 4L-22R and 13R-31L

EC-3, 29 OCT 2026 to 26 NOV 2026
EC-3, 29 OCT 2026 to 26 NOV 2026