WAAS	APP CRS	Rwy Ldg	5826
CH 61147	318°	TDZE	613
W31A		Apt Elev	620

RNAV (GPS) Z RWY 31R


CHICAGO MIDWAY INTL (MDW)

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C.
Rwy 31R helicopter visibility reduction below RVR 4000 NA.

MISSED APPROACH: Climb to 1100 then climbing left turn to 2600 direct EON VORTAC and hold.


D-ATIS	CHICAGO APP CON	MIDWAY TOWER	GND CON
132.75	128.2 353.875	135.2 269.125	118.075

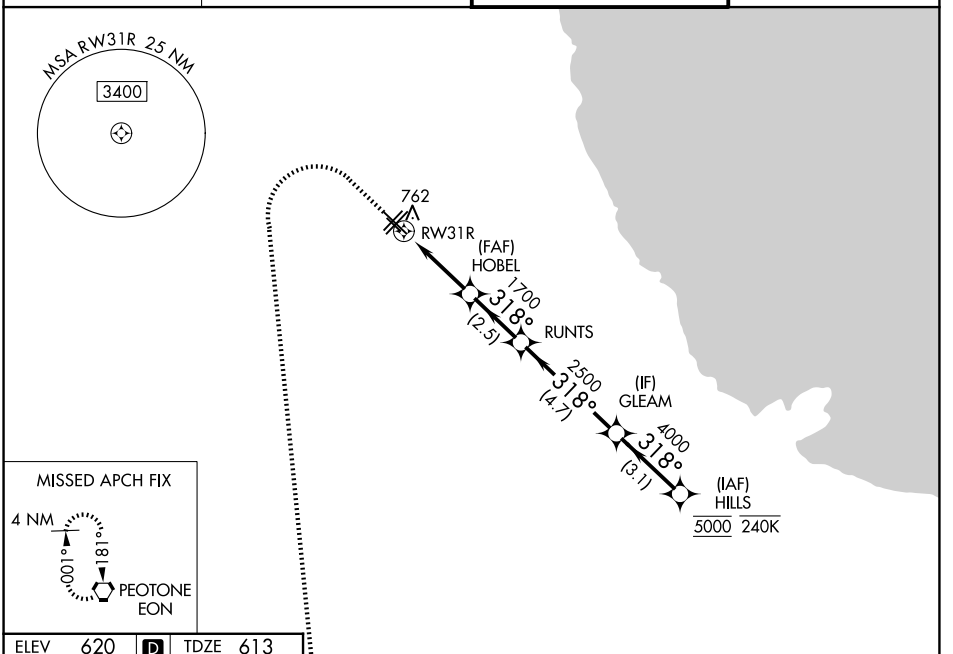


MISSED APCH FIX

ELEV 620 D TDZE 613

REIL Rwys 4R, 22L and 31R
RLLS Rwys 13L and 31R
HIRL Rwys 4R-22L and 13L-31R
MIRL Rwys 4L-22R and 13R-31L



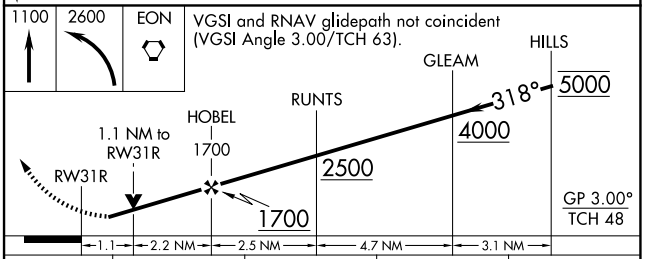

CATEGORY	A	B	C	D
LPV DA	863/40 250 (300-¾)			
LNAV/VNAV DA	953/50 340 (400-1)			
LNAV MDA	1020/55 407 (400-1)		1020/60 407 (400-1¼)	
CIRCLING	1120-1 500 (500-1)		1340-2 720 (800-2)	1340-2¼ 720 (800-2¼)

EC-3, 29 OCT 2026 to 26 NOV 2026
EC-3, 29 OCT 2026 to 26 NOV 2026