RNAV (GPS) Z RWY 4R

CHICAGO MIDWAY INTL (MDW)


WAAS	APP CRS	Rwy Ldg	5927
CH 65614	047°	TDZE	619
W04A		Apt Elev	620

RNP APCH - GPS

Rwy 4R helicopter visibility reduction below RVR 4000 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C.


MISSED APPROACH: Climb to 1100 then climbing right turn to 2600 direct EON VORTAC and hold.

D-ATIS	CHICAGO APP CON	MIDWAY TOWER	GND CON
132.75	128.2 353.875	135.2 269.125	118.075

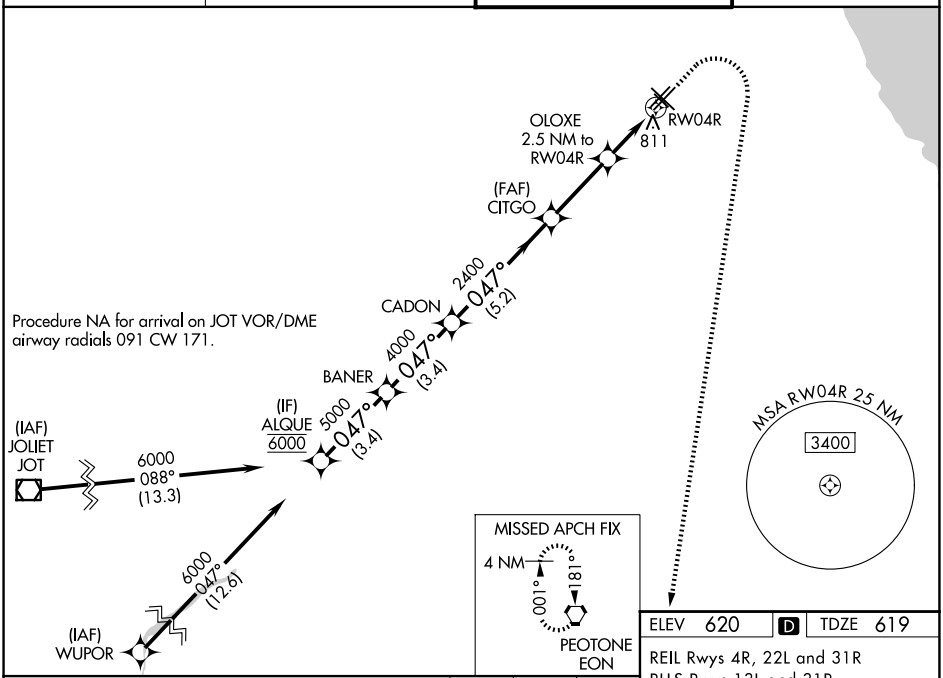


ELEV 620 D TDZE 619

REIL Rwys 4R, 22L and 31R
RLLS Rwys 13L and 31R
HIRL Rwys 4R-22L and 13L-31R
MIRL Rwys 4L-22R and 13R-31L

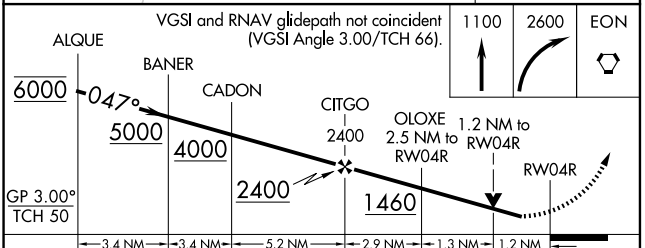

CATEGORY	A	B	C	D
LPV DA	869/40	250 (300-¾)		
LNAV/VNAV DA	1097-1⅜	478 (500-1⅜)		
LNAV MDA	1080/55	461 (500-1)	1080-1⅜	461 (500-1⅜)
CIRCLING	1120-1	500 (500-1)	1340-2	1340-2¼
			720 (800-2)	720 (800-2¼)



EC-3, 29 OCT 2026 to 26 NOV 2026
EC-3, 29 OCT 2026 to 26 NOV 2026