RNAV (GPS) RWY 28

CLEVELAND-HOPKINS INTL (CLE)

WAAS	APP CRS	Rwy Ldg	6018
CH 40109	281°	TDZE	799
W28A		Apt Elev	799


RNP APCH.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). Circling Rwy 10 NA at night. Inop table does not apply to LPV.

MALSF


MISSED APPROACH: Climb to 1400 then climbing left turn to 3000 direct DJB VOR/DME and hold.


D-ATIS	CLEVELAND APP CON	CLEVELAND TOWER	GND CON
127.85	126.55 346.325	124.5 273.45	121.7 273.45

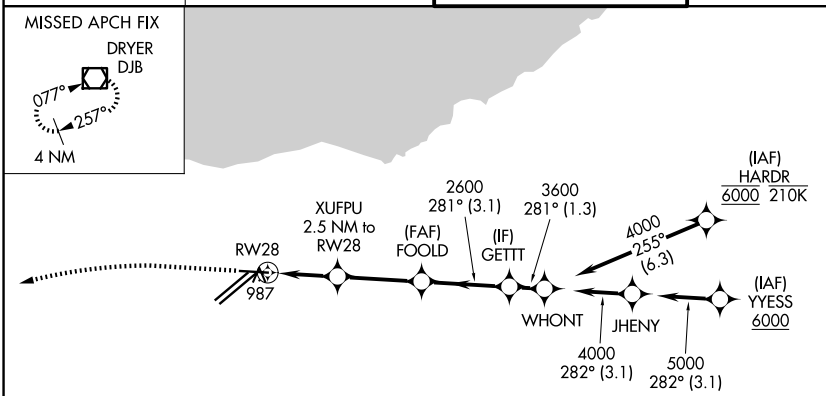



ELEV 799	D	TDZE 799



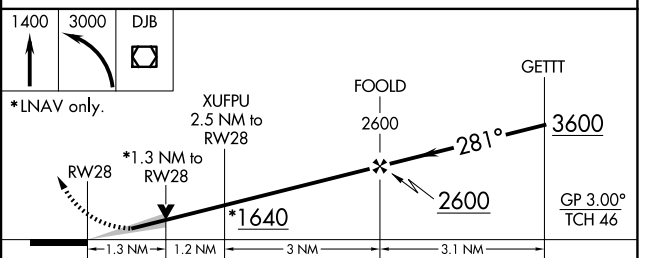

CATEGORY	A	B	C	D
LPV DA	999/40 200 (200-¾)			
LNAV/VNAV DA	1168/40 369 (400-¾)			
LNAV MDA	1260/40 461 (500-¾)		1260/60 461 (500-1¼)	
CIRCLING	1420-1 621 (700-1)		1420-1¾ 621 (700-1¾)	1420-2 621 (700-2)

REIL Rwy 10
TDZ/CL Rwy 6L, 6R, 24L, and 24R
HIRL Rwys 6L-24R, 6R-24L and 10-28

EC-2, 29 OCT 2026 to 26 NOV 2026
EC-2, 29 OCT 2026 to 26 NOV 2026