RNAV (RNP) Z RWY 6R

CLEVELAND-HOPKINS INTL (CLE)

APP CRS	Rwy Ldg	8029
058°	TDZE	777
	Apt Elev	799


RNP AR APCH.


For uncompensated Baro-VNAV systems, procedure NA below -18°C (0°F) or above 46°C (114°F).
For inop ALS, increase RNP 0.15 all Cats visibility to RVR 5500.

MALSR

MISSED APPROACH: Climb to 3000 direct MOMBE and on track 099° to NEIIL and hold.
*Missed approach requires minimum climb of 270 feet per NM to 1400.


D-ATIS	CLEVELAND APP CON	CLEVELAND TOWER	GND CON
127.85	126.55 346.325	124.5 273.45	121.7 273.45

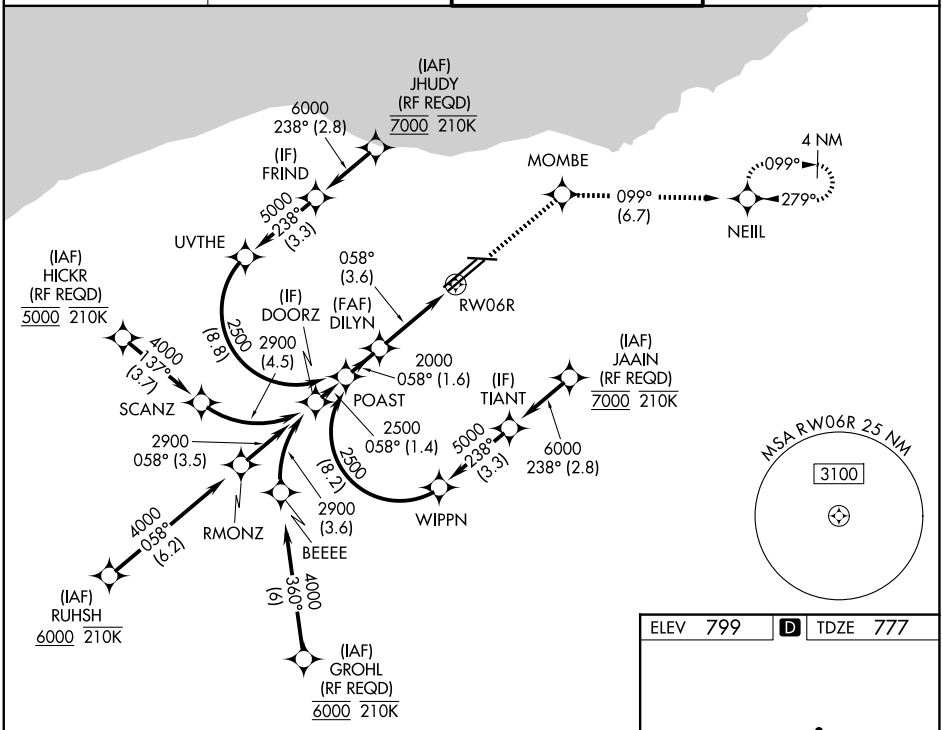

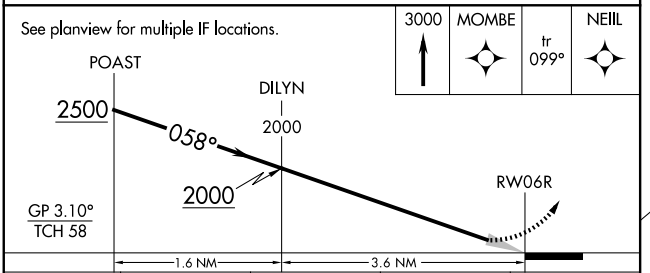

CATEGORY	A	B	C	D
RNP 0.15 DA*		1127/30	350 (400-⅝)	
RNP 0.30 DA		1229/45	452 (500-⅞)	

AUTHORIZATION REQUIRED

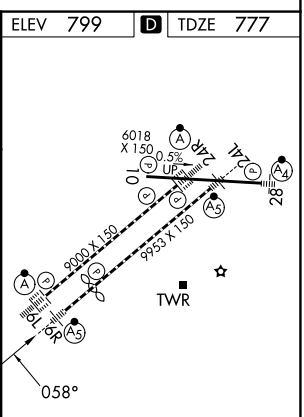

REIL Rwy 10
TDZ/CL Rwy 6L, 6R, 24L, and 24R
HIRL Rwys 6L-24R, 6R-24L and 10-28

EC-2, 29 OCT 2026 to 26 NOV 2026
EC-2, 29 OCT 2026 to 26 NOV 2026