RNAV (GPS) Y RWY 6L

CLEVELAND-HOPKINS INTL (CLE)

WAAS	APP CRS	Rwy Ldg	9000
CH 56204	058°	TDZE	773
W06A		Apt Elev	799


RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). Circling Rwy 10 NA at night. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 5500 and increase LNAV Cats C/D visibility to 1⅜ SM.


ALSF-2


MISSED APPROACH: Climb to 3000 direct ACAPO and on track 001° to PASLE and hold.

D-ATIS	CLEVELAND APP CON	CLEVELAND TOWER	GND CON
127.85	126.55 346.325	124.5 273.45	121.7 273.45

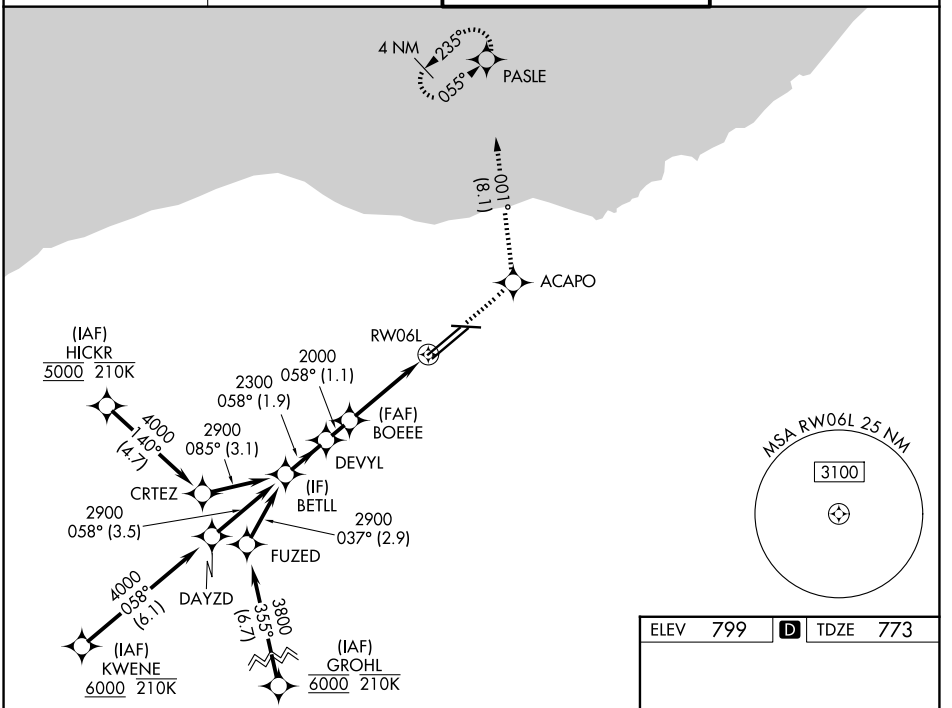

ELEV 799 D TDZE 773



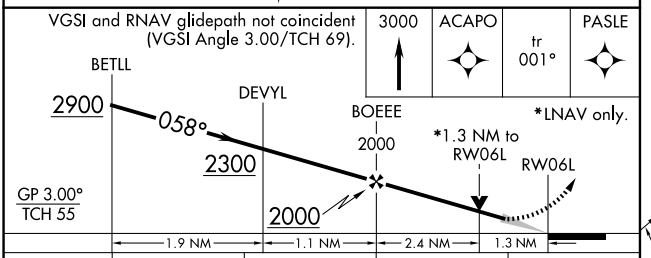

CATEGORY	A	B	C	D
LPV DA	973/18 200 (200-½)			
LNAV/VNAV DA	1120/30 347 (400-⅝)			
LNAV MDA	1260/24 487 (500-½)		1260/50 487 (500-1)	
CIRCLING	1420-1 621 (700-1)		1420-1¾ 621 (700-1¾)	1420-2 621 (700-2)

REIL Rwy 10
TDZ/CL Rwy 6L, 6R, 24L, and 24R
HIRL Rwys 6L-24R, 6R-24L and 10-28

EC-2, 29 OCT 2026 to 26 NOV 2026
EC-2, 29 OCT 2026 to 26 NOV 2026