LOC I-COS	APP CRS	Rwy Ldg	11022
109.9	352°	TDZE	6075
		Apt Elev	6187

ILS RWY 35L (SA CAT II)

CITY OF COLORADO SPRINGS MUNI (COS)

RADAR monitoring required when R-2601 in use. Requires specific OPSPEC, MSPEC, or LOA approval.

MALSR

MISSED APPROACH: Climb to 6700 then climbing right turn to 9000 on heading 047° and BRK VOR/DME R-091 to ADANE INT/BRK 11.1 DME and hold.

ATIS	SPRINGS APP CON	SPRINGS TOWER	GND CON
125.0 254.3	124.0 257.875	119.9 360.6	121.7 348.6

BLACK FOREST 112.5 BRK Chan 72

ADANE BRK 11.1

R-091

271°

091°

PUB R-354

LOCALIZER 109.9 I-COS

R-2602

MSA CO 25 NM

191° 9100

15300

251°

021° 8100

R-182

PETEY 407 CO

R-145

R-2601 A & B

AIRBURST X MOA

(IF) MIDAY INT BRK 22.7

352°

(7.4)

8000

LR-176

(IAF) DRAKE BRK 22.7

8000 BRK 22.7 Arc

R-313

172°


8000 313° (21.4)


IAF PUEBLO 116.7 PUB Chan 114

Procedure NA for arrival on PUB VORTAC airway radials 267 CW 354 .

ELEV 6187 D TDZE 6075

HIRL Rwys 17R-35L and 17L-35R
REIL Rwys 13, 17R, 31 and 35R
TDZL/RCLS Rwys 17L and 35R
MIRL Rwy 13-31



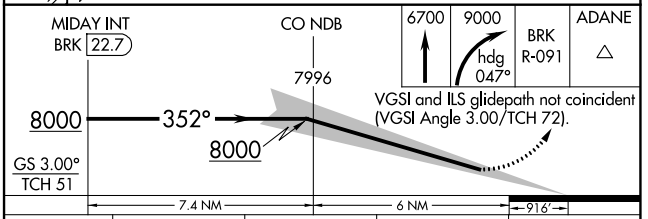

CATEGORY	A	B	C	D
S-ILS 35L	RA 123/12 100 DA 6175			

SA CATEGORY II ILS - SPECIAL AIRCREW & AIRCRAFT CERTIFICATION REQUIRED

SW-1, 29 OCT 2026 to 26 NOV 2026
SW-1, 29 OCT 2026 to 26 NOV 2026