LOC/DME I-LPI	APP CRS	Rwy Ldg 13500
109.1	172°	TDZE 6187
Chan 28		Apt Elev 6187

ILS or LOC RWY 17L

CITY OF COLORADO SPRINGS MUNI (COS)


DME or RADAR required for procedure entry.


Simultaneous approach authorized with Rwy 17R.

MALSR

MISSED APPROACH: Climb to 7200 then climbing left turn to 9000 on heading 020° and on BRK VOR/DME R-091 to ADANE INT/BRK VOR/DME 11.1 DME and hold.


ATIS	SPRINGS APP CON	SPRINGS TOWER	GND CON
125.0 254.3	124.0 257.875	119.9 360.6	121.7 348.6

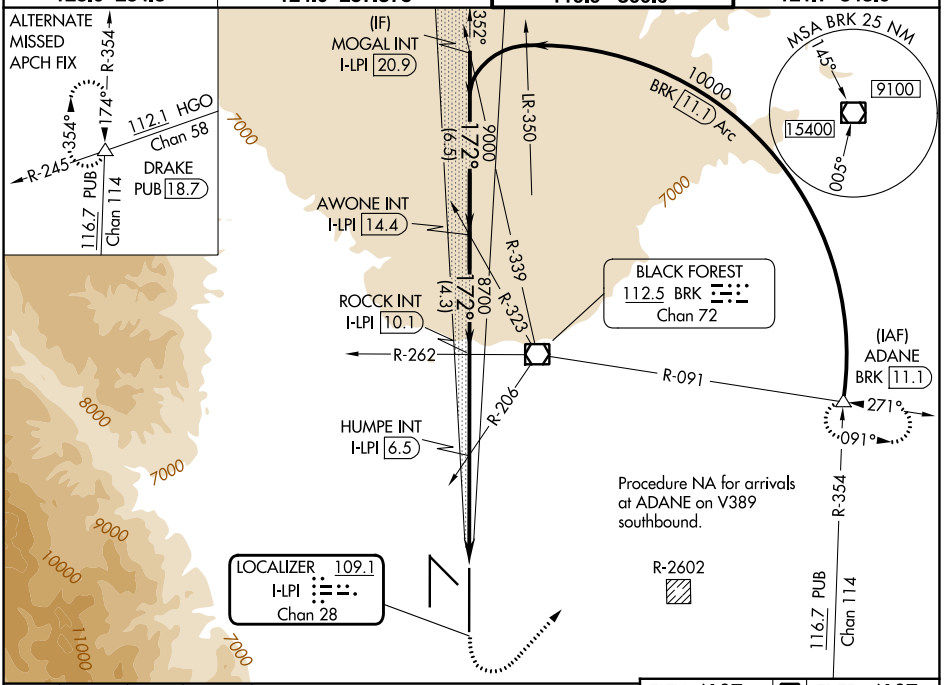

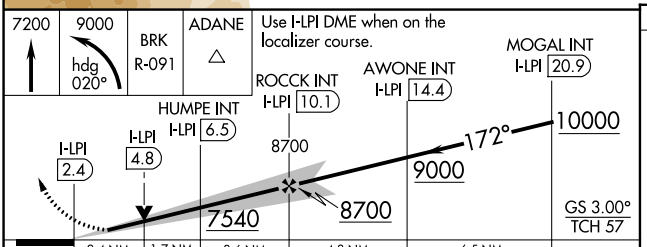

CATEGORY	A	B	C	D
S-ILS 17L	6387/18 200 (200-½)			
S-LOC 17L	7540/40 1353 (1400-¾)	7540/55 1353 (1400-1)	7540-3 1353 (1400-3)	
CIRCLING	7540-1¼ 1353 (1400-1¼)	7540-1½ 1353 (1400-1½)	7540-3 1353 (1400-3)	
HUMPE FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED)				
S-LOC 17L	7020/24 833 (900-½)	7020/40 833 (900-¾)	7020-1⅞ 833 (900-1⅞)	
CIRCLING	7020-1¼ 833 (900-1¼)		7040-2½ 853 (900-2½)	7260-3 1073 (1100-3)

ELEV 6187 D TDZE 6187

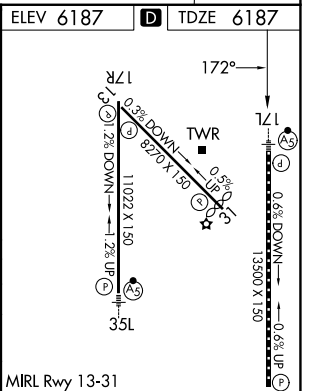

MIRL Rwy 13-31
HIRL Rwys 17R-35L and 17L-35R
REIL Rwys 13, 17R, 31 and 35R
TDZL/RCLS Rwys 17L and 35R

FAF to MAP 7.7 NM

Knots	60	90	120	150	180
Min:Sec	7:42	5:08	3:51	3:05	2:34

SW-1, 29 OCT 2026 to 26 NOV 2026
SW-1, 29 OCT 2026 to 26 NOV 2026