LOC/DME I-AHI	APP CRS	Rwy Ldg 13500
109.1	352°	TDZE 6118
Chan 28		Apt Elev 6187


ILS or LOC RWY 35R

CITY OF COLORADO SPRINGS MUNI (COS)

RADAR required when R-2601 in use.

MISSED APPROACH: Climb to 6700 then climbing right turn to 9000 on heading 047° and on BRK VOR/DME R-091 to ADANE INT/BRK 11.1 DME and hold.

ATIS	SPRINGS APP CON	SPRINGS TOWER	GND CON
125.0 254.3	124.0 257.875	119.9 360.6	121.7 348.6

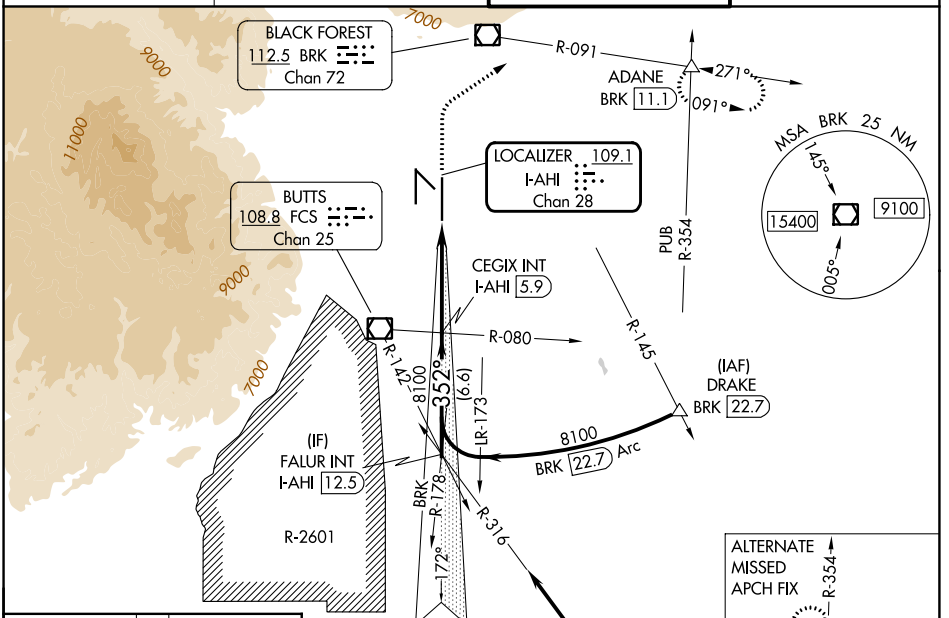


ELEV 6187 | D | TDZE 6118

MIRL Rwy 13-31

HIRL Rwys 17R-35L and 17L-35R


REIL Rwys 13, 17R, 31 and 35R

TDZL/RCLS Rwys 17L and 35R

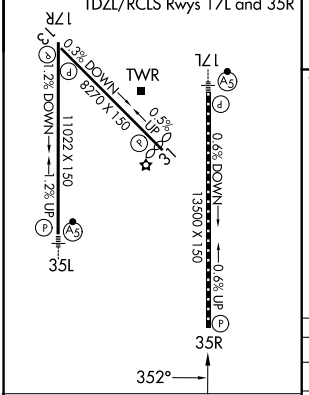

Procedure NA for arrival on PUB VORTAC airway radials 267 CW 354.

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 71).

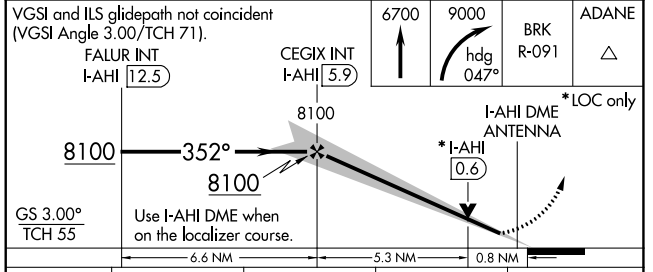

CATEGORY	A	B	C	D
S-ILS 35R	6318/40		200 (200-¾)	
S-LOC 35R	6420/55	302 (300-1)	6420/45	302 (300-⅞)
CIRCLING	6740-1 553 (600-1)	6800-1 613 (700-1)	7040-2½ 853 (900-2½)	7260-3 1073 (1100-3)

FAF to MAP 6.1 NM

Knots	60	90	120	150	180
Min:Sec	6:06	4:04	3:03	2:26	2:02

SW-1, 29 OCT 2026 to 26 NOV 2026
SW-1, 29 OCT 2026 to 26 NOV 2026