WAAS	APP CRS	Rwy Ldg	11022
CH 72800	172°	TDZE	6177
W17B		Apt Elev	6187

RNAV (GPS) Y RWY 17R


CITY OF COLORADO SPRINGS MUNI (COS)


RNP APCH - GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C. Simultaneous approach authorized with ILS or LOC RWY 17L and ILS RWY 17L (SA CAT I). LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

MISSED APPROACH: Climb to 7000 then climbing left turn to 9000 direct DRAKE and hold.

ATIS	SPRINGS APP CON	SPRINGS TOWER	GND CON
125.0 254.3	124.0 257.875	119.9 360.6	121.7 348.6

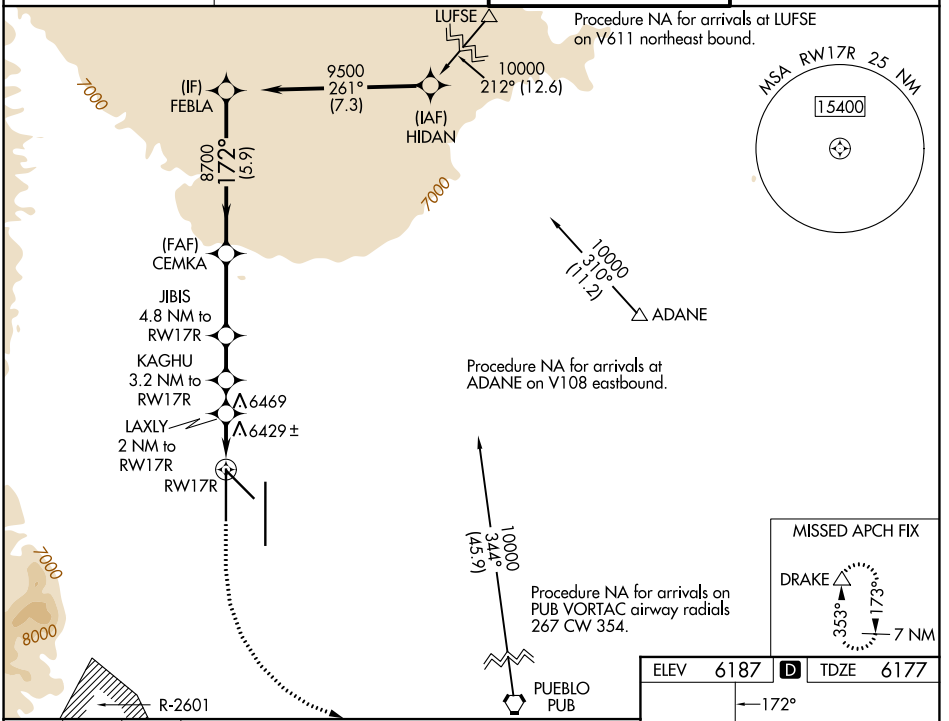

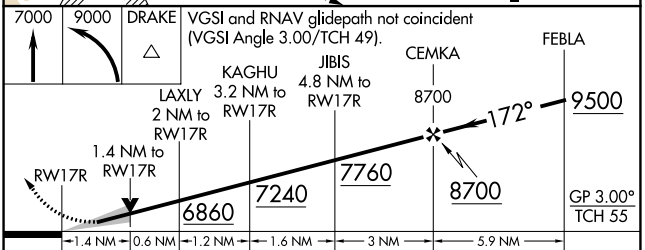

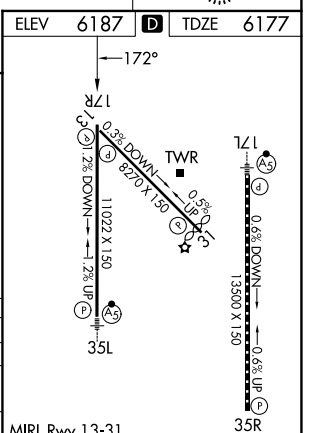

CATEGORY	A	B	C	D
LPV DA	6377/40 200 (200-¾)			
LNAV/VNAV DA	6752-2 575 (600-2)			
LNAV MDA	6680/55 503 (500-1)		6680-1⅜ 503 (500-1⅜)	
CIRCLING	6740-1 553 (600-1)	6800-1 613 (700-1)	7040-2½ 853 (900-2½)	7260-3 1073 (1100-3)

MIRL Rwy 13-31
TDZL/RCLS Rwys 17L and 35R
REIL Rwys 13, 17R, 31 and 35R
HIRL Rwys 17R-35L and 17L-35R

SW-1, 29 OCT 2026 to 26 NOV 2026