| WAAS CH 53602 W35B | APP CRS 352° | Rwy Ldg 13500 TDZE 6118 Apt Elev 6187 |
|---|---|---|


# RNAV (GPS) Y RWY 35R

CITY OF COLORADO SPRINGS MUNI (COS)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-5°F) or above 39°C (103°F). DME/DME RNP-0.3 NA. RADAR monitoring required when R-2601 in use.


MISSED APPROACH: Climb to 6600 then climbing right turn to 9000 direct ADANE and hold.


| ATIS | SPRINGS APP CON | SPRINGS TOWER | GND CON |
|---|---|---|---|
| 125.0 254.3 | 124.0 257.875 | 119.9 360.6 | 121.7 348.6 |

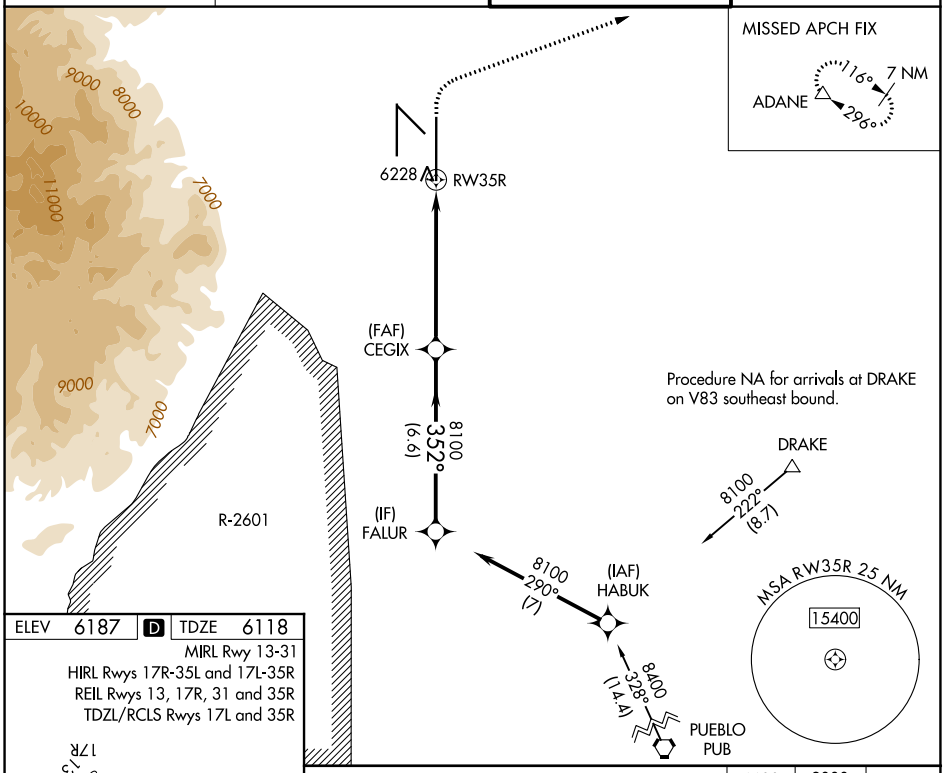


ELEV 6187 D TDZE 6118

MIRL Rwy 13-31
HIRL Rwys 17R-35L and 17L-35R
REIL Rwys 13, 17R, 31 and 35R
TDZL/RCLS Rwys 17L and 35R

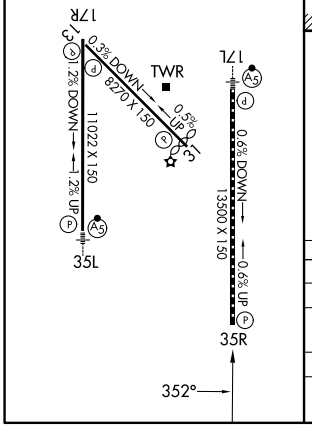

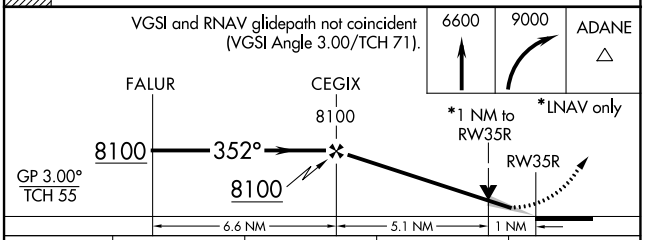
| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 6318/40 200 (200-¾) | | | |
| LNAV/VNAV DA | 6399/45 281 (300-⅞) | | | |
| LNAV MDA | 6500/55 382 (400-1) | | 6500/60 382 (400-1¼) | |
| CIRCLING | 6740-1 553 (600-1) | 6800-1 613 (700-1) | 7040-2½ 853 (900-2½) | 7260-3 1073 (1100-3) |



SW-1, 29 OCT 2026 to 26 NOV 2026
SW-1, 29 OCT 2026 to 26 NOV 2026