RNAV (GPS) RWY 5

COLUMBIA METRO (CAE)

WAAS	APP CRS	Rwy Ldg	7001
CH 45526	052°	TDZE	228
W05A		Apt Elev	236


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 6000 and LNAV Cats C and D visibility to 1⅜ SM. *RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR


MISSED APPROACH: Climb to 2400 direct POMIE and on track 018° to BEFTY and hold.

ATIS	COLUMBIA APP CON	COLUMBIA TOWER	GND CON
120.15	124.15 338.2 (110°-289°) 133.4 285.6 (290°-109°)	119.5 257.8	121.9 348.6

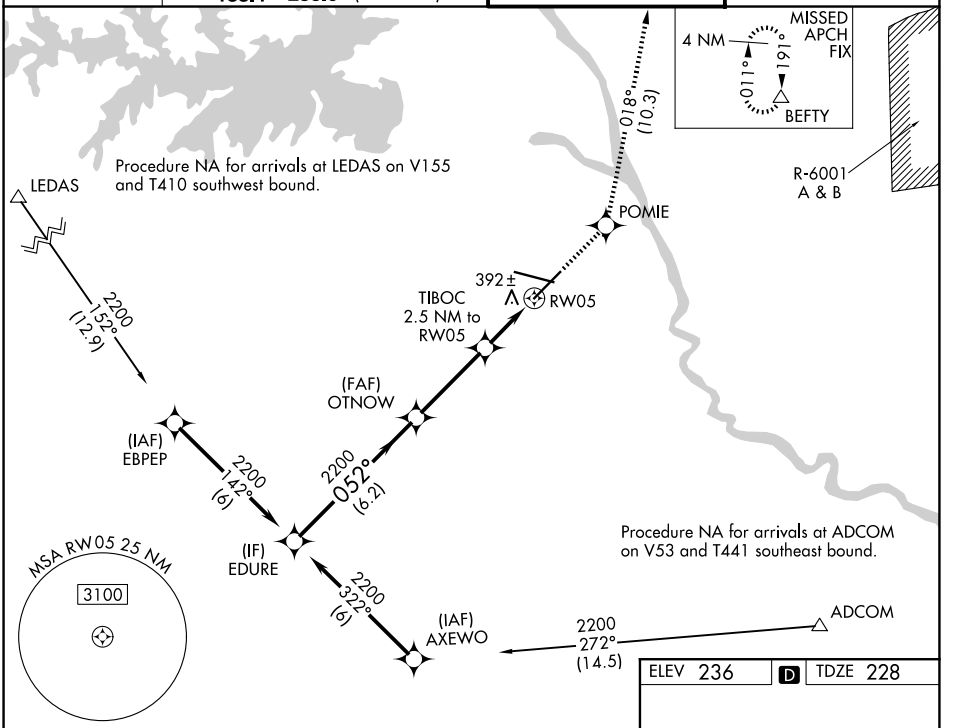


VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 73).

2400	POMIE	tr 018°	BEFTY

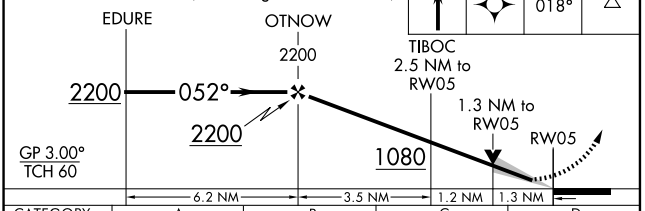

CATEGORY	A	B	C	D
LPV DA*	428/24 200 (200-½)			
LNAV/VNAV DA	638/40 410 (500-¾)			
LNAV MDA	700/24 472 (500-½)		700/50 472 (500-1)	
CIRCLING	740-1 504 (600-1)	860-1 624 (700-1)	1040-2¼ 804 (900-2¼)	1040-2½ 804 (900-2½)

ELEV 236 D TDZE 228



SE-2, 29 OCT 2026 to 26 NOV 2026
SE-2, 29 OCT 2026 to 26 NOV 2026