LOC/DME I-ONB	APP CRS	Rwy Ldg 8000
109.1	281°	TDZE 813
Chan 28		Apt Elev 815

ILS or LOC RWY 28R

JOHN GLENN COLUMBUS INTL (CMH)

DME or RADAR required.


Simultaneous approach authorized. Autopilot coupled approach NA.

For inop ALS, increase S-LOC 28R Cat C/D visibility to 1⅜ SM.


MALSR


MISSED APPROACH: Climb to 1400 then climbing right turn to 3000 direct APE VORTAC and hold.

D-ATIS	COLUMBUS APP CON	COLUMBUS TOWER	GND CON
124.6	125.95 371.975	132.7 257.8	121.9 348.6

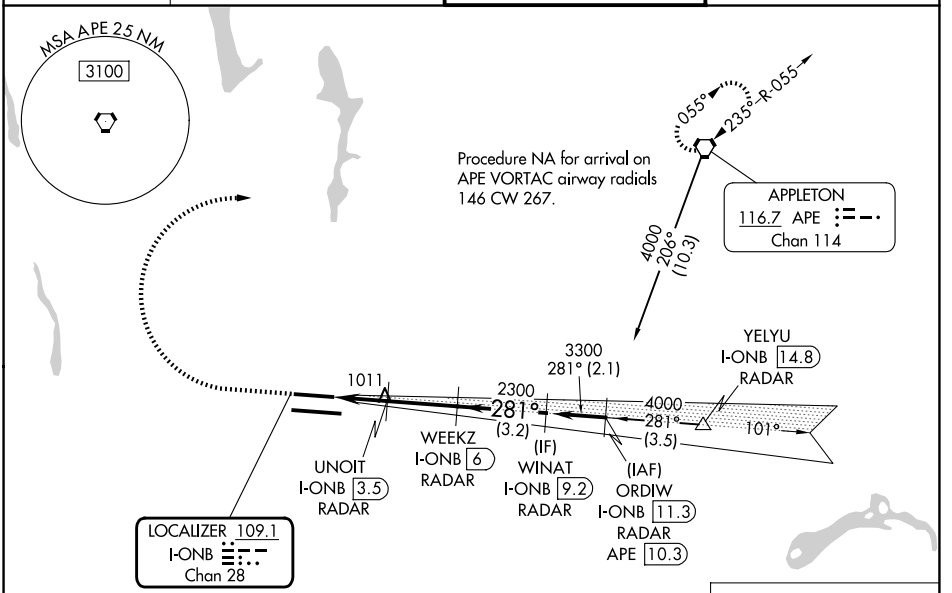

ELEV 815 D TDZE 813



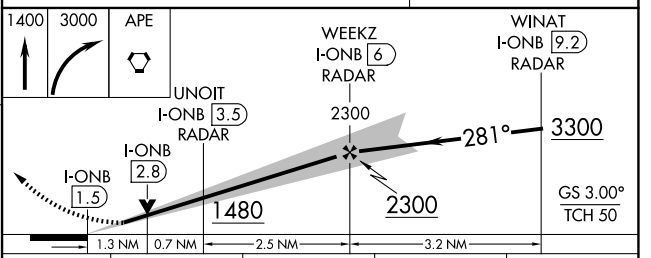

TDZL/RCLS Rwy 10R-28L
HIRL Rwys 10R-28L and 10L-28R

FAF to MAP 4.5 NM

Knots	60	90	120	150	180
Min:Sec	4:30	3:00	2:15	1:48	1:30

CATEGORY	A	B	C	D
S-ILS 28R	1013/24 200 (200-½)			
S-LOC 28R	1280/24 467 (500-½)		1280/50 467 (500-1)	
CIRCLING	1340-1 525 (600-1)		1520-2 705 (800-2)	1520-2¼ 705 (800-2¼)

EC-2, 29 OCT 2026 to 26 NOV 2026
EC-2, 29 OCT 2026 to 26 NOV 2026