ILS or LOC RWY 13L

DALLAS LOVE FLD (DAL)

LOC/DME I-DAL	APP CRS	Rwy Ldg	7352
111.5	133°	TDZE	485
Chan 52		Apt Elev	487


RADAR required for procedure entry.


Simultaneous approach authorized.


MALSR

MISSED APPROACH: Climb to 1000 then climbing left turn to 3000 on heading 060° and CVE VOR/DME R-087 to SOLDO INT/CVE 28.9 DME and hold.

D-ATIS	LONE STAR APP CON	LOVE TOWER	GND CON
120.15	124.3 282.275 (N) 125.2 343.65 (S)	123.7 239.3	121.75 348.6

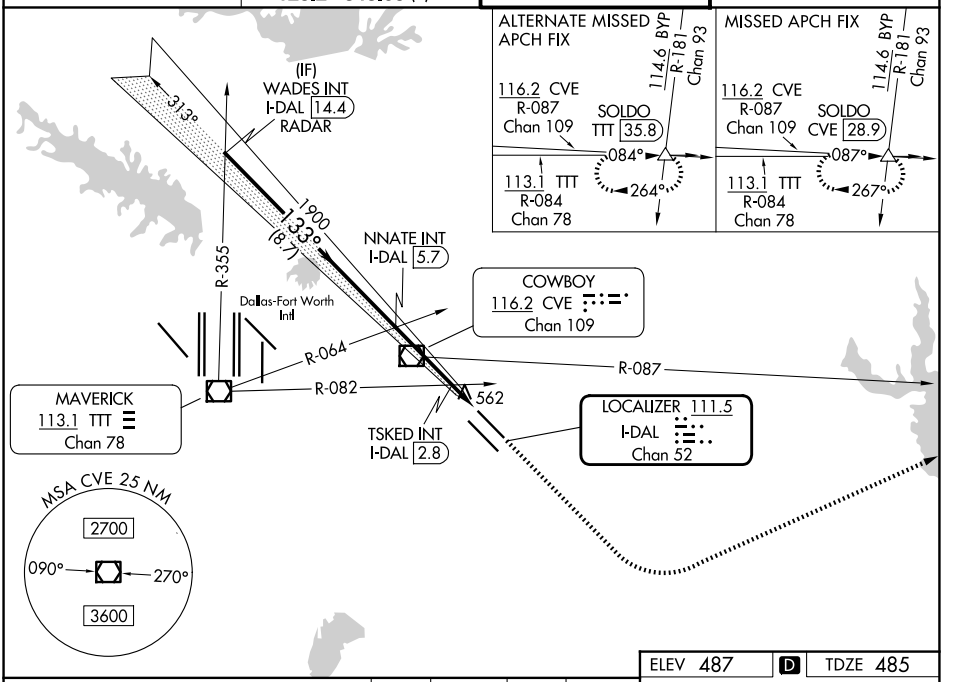

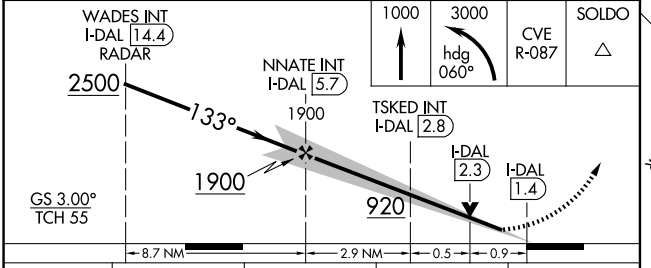

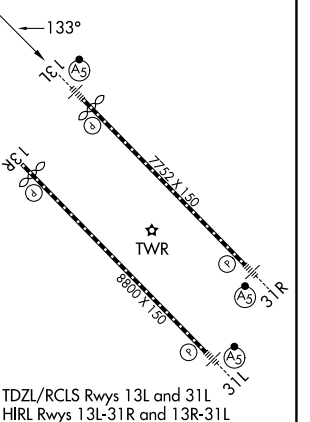

TDZL/RCLS Rwys 13L and 31L
HIRL Rwys 13L-31R and 13R-31L

CATEGORY	A	B	C	D
S-ILS 13L	685/18	200 (200-½)		
S-LOC 13L	920/24	435 (500-½)	920/40	435 (500-¾)
CIRCLING	1000-1 513 (600-1)	1140-1 653 (700-1)	1280-2¼ 793 (800-2¼)	1520-3 1033 (1100-3)
TSKED FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED)				
S-LOC 13L	820/24	335 (400-½)	820/26	335 (400-½)
CIRCLING	1000-1 513 (600-1)	1140-1 653 (700-1)	1280-2¼ 793 (800-2¼)	1520-3 1033 (1100-3)

FAF to MAP 4.3 NM

Knots	60	90	120	150	180
Min:Sec	4:18	2:52	2:09	1:43	1:26

SC-2, 29 OCT 2026 to 26 NOV 2026
SC-2, 29 OCT 2026 to 26 NOV 2026