RNAV (RNP) Z RWY 31L

DALLAS LOVE FLD (DAL)


APP CRS	Rwy Ldg	8000
313°	TDZE	476
	Apt Elev	487


For uncompensated Baro-VNAV systems, procedure NA below -5°C (23°F) or above 48°C (119°F). Simultaneous approach authorized. GPS required. Use of FD or AP providing RNAV track guidance required during simultaneous operations. For inop MALSR, increase RNP 0.30 visibility all Cats to 2½ miles.

MALSR (A5)


MISSED APPROACH: Climb to 1700 then climbing right turn to 4000 direct TADDI and hold.

D-ATIS	LONE STAR APP CON	LOVE TOWER	GND CON
120.15	124.3 282.275 (N) 125.2 343.65 (S)	123.7 239.3	121.75 348.6

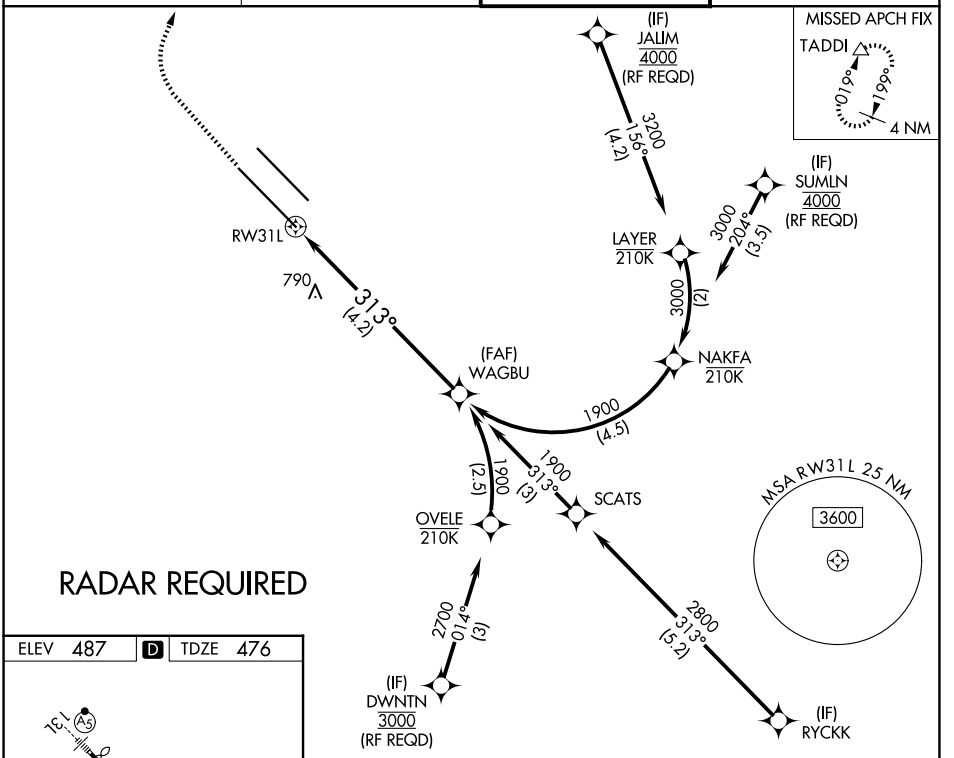

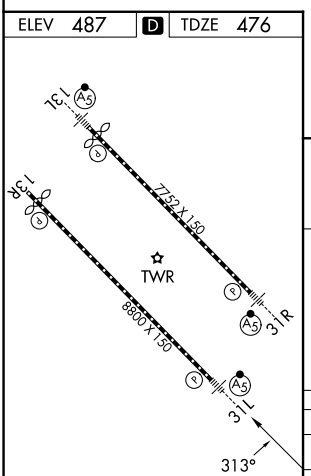

1700	4000	TADDI	See planview for multiple IF locations.

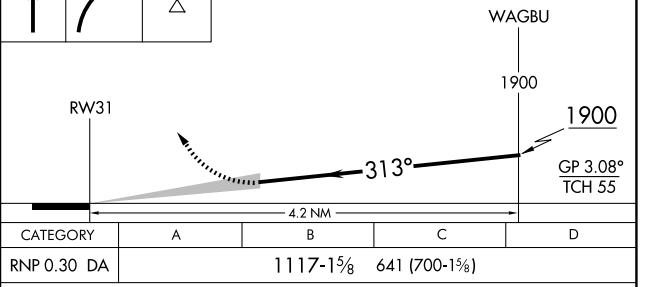

CATEGORY	A	B	C	D
RNP 0.30 DA	1117-1⅝	641 (700-1⅝)		

AUTHORIZATION REQUIRED

SC-2, 29 OCT 2026 to 26 NOV 2026
SC-2, 29 OCT 2026 to 26 NOV 2026