RNAV (RNP) Z RWY 31R

DALLAS LOVE FLD (DAL)

APP CRS	Rwy Ldg	6952
313°	TDZE	487
	Apt Elev	487


RNP AR APCH.

For uncompensated Baro-VNAV systems, procedure NA below -5°C (23°F) or above 54°C (130°F). Use of FD or AP providing RNAV track guidance required during simultaneous operations. Simultaneous approach authorized.


MALSR

MISSED APPROACH: Climb to 900 then climbing right turn to 5000 direct FINGR and hold.

D-ATIS	LONE STAR APP CON	LOVE TOWER	GND CON
120.15	124.3 282.275 (N) 125.2 343.65 (S)	123.7 239.3	121.75 348.6

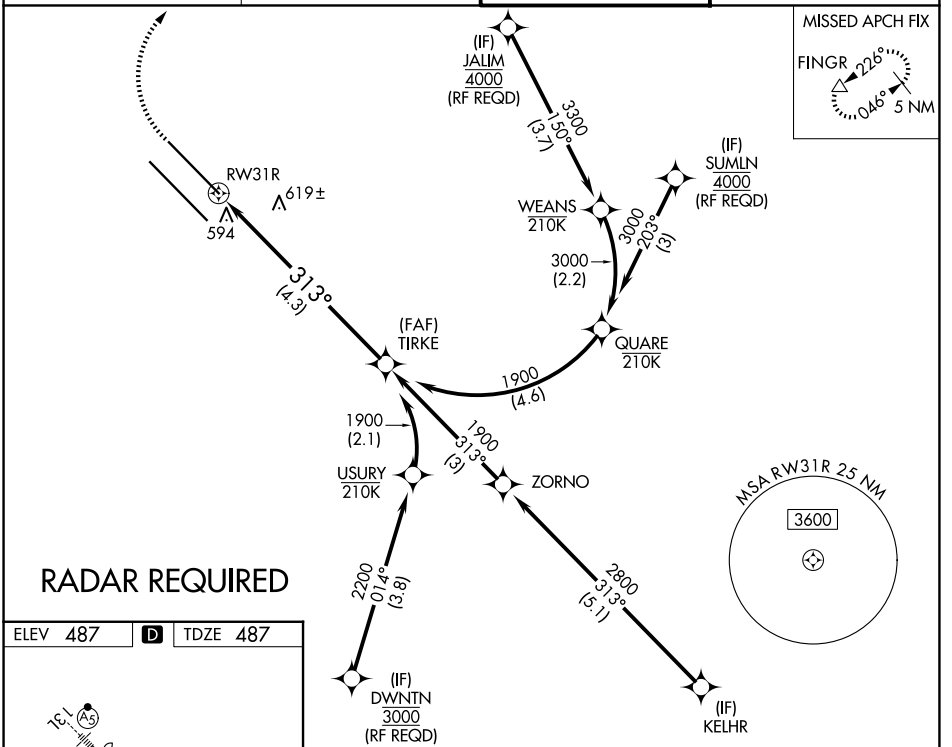

ELEV 487 | D | TDZE 487

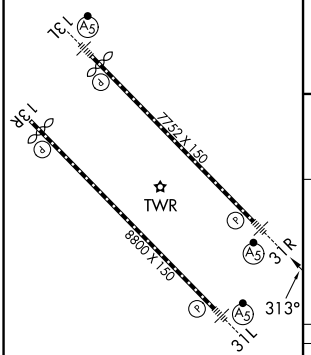


TDZL/RCLS Rwys 13L and 31L
HIRL Rwys 13L-31R, and 13R-31L

900	5000	FINGR
↑	↱	△

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 55).

See planview for multilple IF locations.

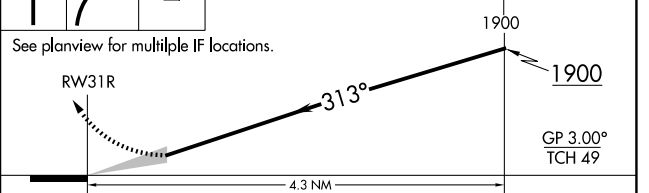

CATEGORY	A	B	C	D
RNP 0.16 DA		796/24	309 (400-½)	
RNP 0.30 DA		895/45	408 (500-⅞)	

AUTHORIZATION REQUIRED

SC-2, 29 OCT 2026 to 26 NOV 2026

SC-2, 29 OCT 2026 to 26 NOV 2026