RNAV (GPS) Z RWY 13L

DALLAS LOVE FLD (DAL)

WAAS	APP CRS	Rwy Ldg	7352
CH 99723	133°	TDZE	485
W13B		Apt Elev	487


RNP APCH - GPS.

LNAV procedure NA during simultaneous operations. Simultaneous approach authorized. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500 and LNAV Cats C/D visibility to RVR 5500.


MALSR


MISSED APPROACH: Climb to 1000 then climbing left turn to 3000 direct SOLDO and hold.

D-ATIS	LONE STAR APP CON	LOVE TOWER	GND CON
120.15	124.3 282.275 (N) 125.2 343.65 (S)	123.7 239.3	121.75 348.6

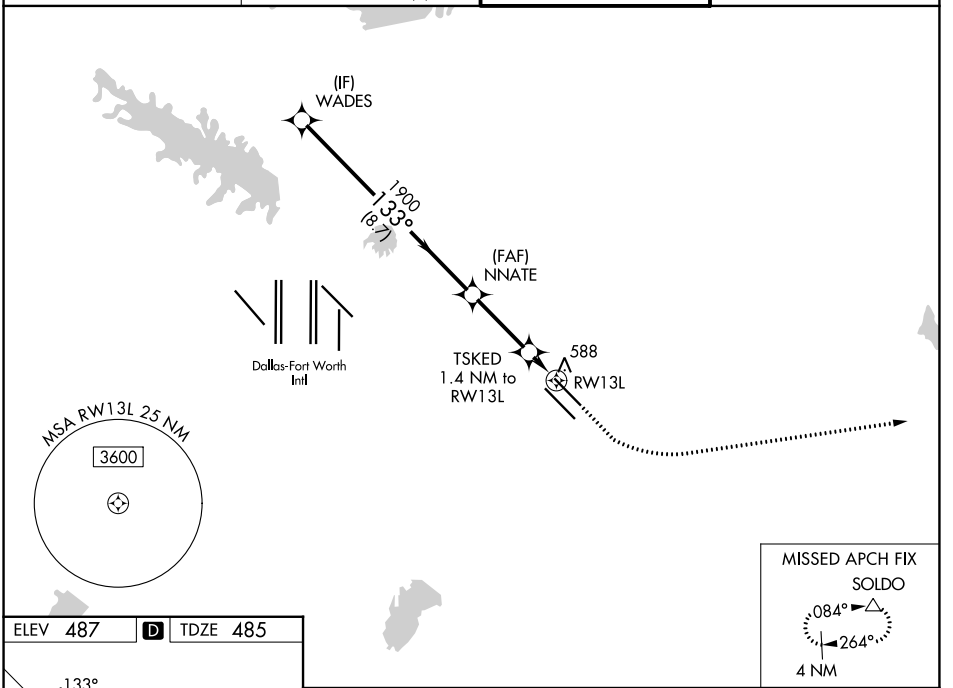

ELEV 487 | D | TDZE 485

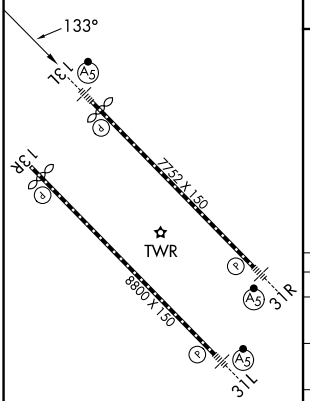

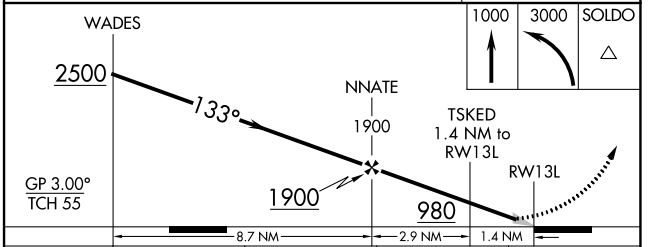

CATEGORY	A	B	C	D
LPV DA	685/18 200 (200-½)			
LNAV/VNAV DA	764/24 279 (300-½)			
LNAV MDA	840/24 355 (400-½)		840/30 355 (400-⅝)	
CIRCLING	1000-1 513 (600-1)	1140-1 653 (700-1)	1280-2¼ 793 (800-2¼)	1520-3 1033 (1100-3)

TDZL/RCLS Rwys 13L and 31L
HIRL Rwys 13L-31R and 13R-31L

SC-2, 29 OCT 2026 to 26 NOV 2026
SC-2, 29 OCT 2026 to 26 NOV 2026