ILS or LOC RWY 24L

JAMES M COX DAYTON INTL (DAY)

LOC I-EGK	APP CRS	Rwy Ldg	7001
110.3	241°	TDZE	1007
Chan 40		Apt Elev	1009

DME required.


T Simultaneous approach authorized.

RVR 1800 authorized with use of FD or AP or HUD to DA.


MALSR


MISSED APPROACH: Climb to 3000 on heading 241° and DQN R-180 to MIMMS/DQN 18 DME and hold.

ATIS	COLUMBUS APP CON	DAYTON TOWER	GND CON
125.8	118.85 305.2 (091°-180°) 134.45 323.15 (181°-090°)	119.9 257.7	121.9

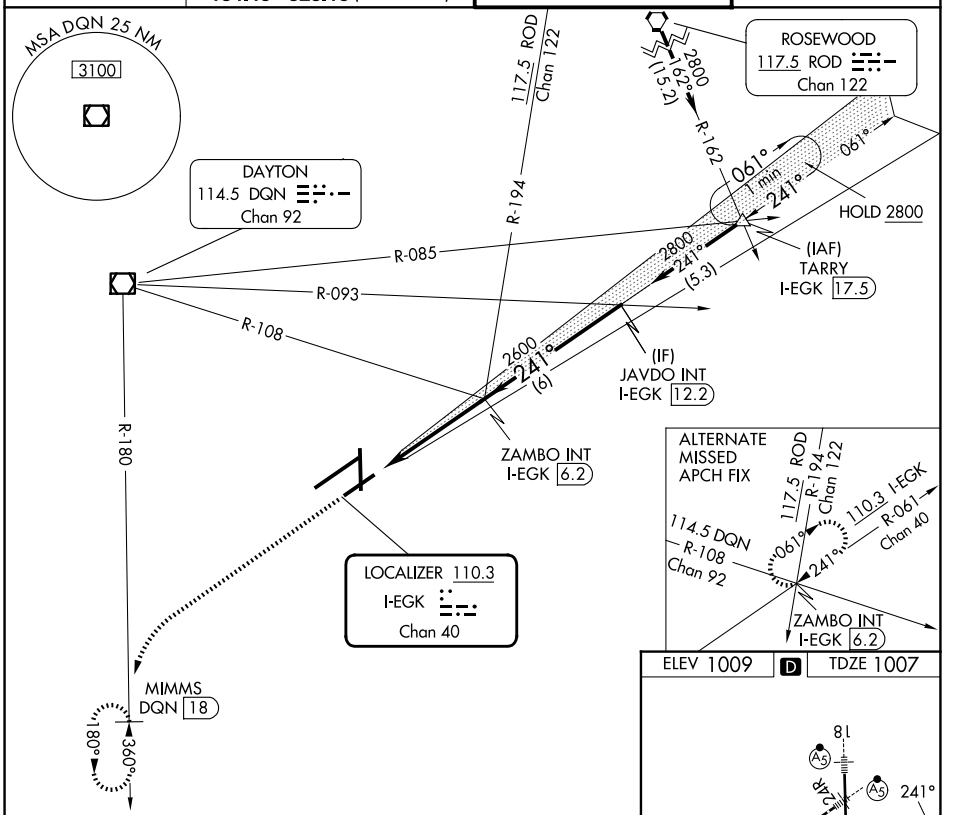

ELEV 1009 D TDZE 1007



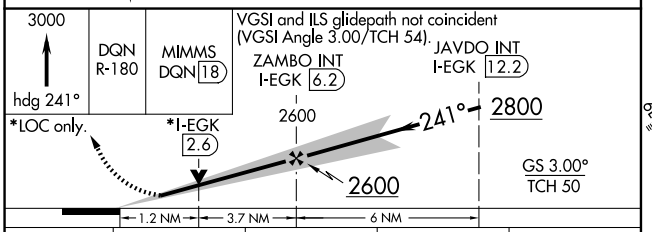

HIRL all Rwys
TDZL/RCLS Rwy 6L
REIL Rwys 6R and 36

CATEGORY	A	B	C	D
S-ILS 24L #	1207/24 200 (200-½)			
S-LOC 24L	1440/24 433 (500-½)		1440/40 433 (500-¾)	
CIRCLING	1580-1 571 (600-1)		1580-1½ 571 (600-1½)	1640-2 631 (700-2)

FAF to MAP 4.9 NM

Knots	60	90	120	150	180
Min:Sec	4:54	3:16	2:27	1:58	1:38

EC-2, 29 OCT 2026 to 26 NOV 2026
EC-2, 29 OCT 2026 to 26 NOV 2026