WAAS	APP CRS	Rwy Ldg	7001
CH 90414	061°	TDZE	1009
W06B		Apt Elev	1009

RNAV (GPS) RWY 6R


JAMES M COX DAYTON INTL (DAY)


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Rwy 6R helicopter visibility reduction below ¾ SM NA. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations.

MISSED APPROACH: Climb to 3000 direct TARRY and hold.


ATIS	COLUMBUS APP CON	DAYTON TOWER	GND CON
125.8	118.85 305.2 (091°-180°) 134.45 323.15 (181°-090°)	119.9 257.7	121.9

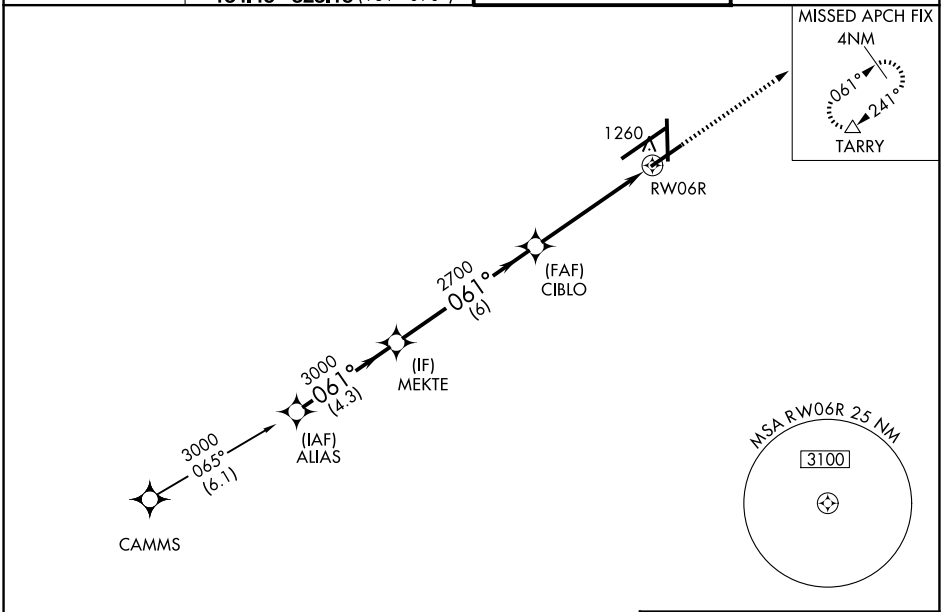

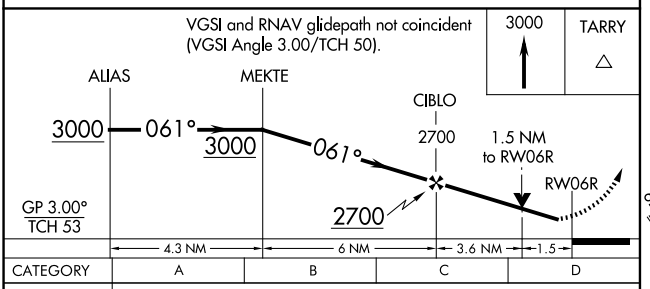

CATEGORY	A	B	C	D
LPV DA	1260-¾ 251 (300-¾)			
LNAV/VNAV DA	1496-1¾ 487 (500-1¾)			
LNAV MDA	1520-1 511 (600-1)		1520-1½ 511 (600-1½)	1520-1¾ 511 (600-1¾)
CIRCLING	1580-1 571 (600-1)		1580-1½ 571 (600-1½)	1640-2 631 (700-2)

ELEV 1009 D TDZE 1009



HIRL all rwys
TDZL/RCLS Rwy 6L
REIL Rwys 6R and 36

EC-2, 29 OCT 2026 to 26 NOV 2026
EC-2, 29 OCT 2026 to 26 NOV 2026