RNAV (GPS) Z RWY 24R

JAMES M COX DAYTON INTL (DAY)

WAAS CH 66013 W24B	APP CRS 241°	Rwy Ldg 10900 / TDZE 997 / Apt Elev 1009


RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500.


MALSR


MISSED APPROACH: Climb to 3000 direct ZUXOT and on track 238° to ALIAS and hold.

ATIS	COLUMBUS APP CON	DAYTON TOWER	GND CON
125.8	118.85 305.2 (091°-180°) 134.45 323.15 (181°-090°)	119.9 257.7	121.9

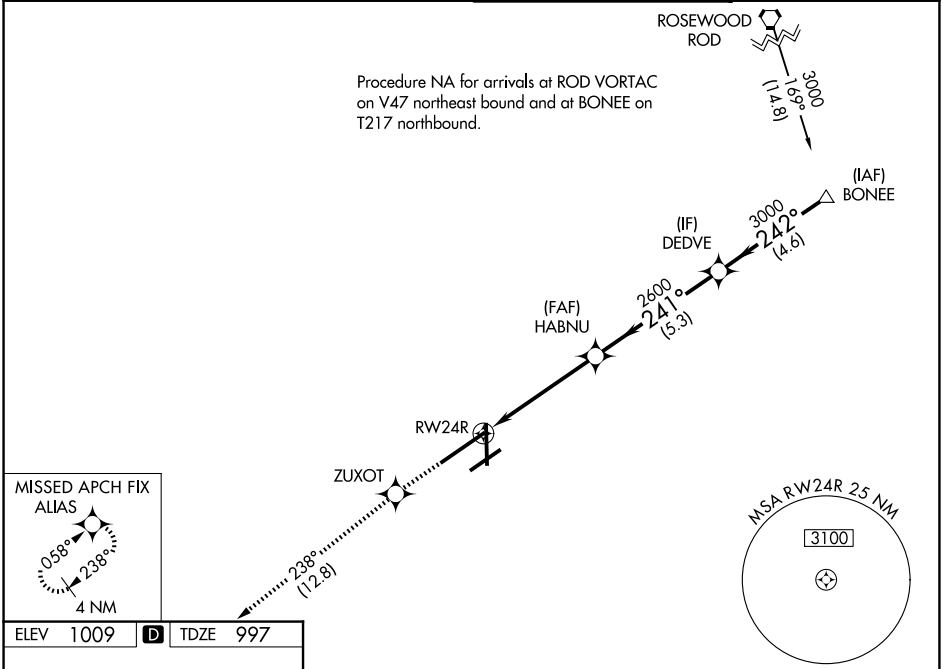

ELEV 1009 D TDZE 997



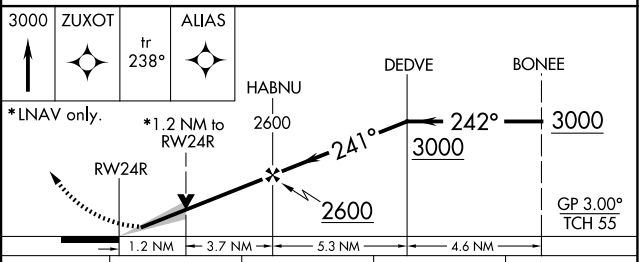

CATEGORY	A	B	C	D
LPV DA	1203/24 206 (200-½)			
LNAV/VNAV DA	1294/24 297 (300-½)			
LNAV MDA	1440/24 443 (500-½)		1440/45 443 (500-⅞)	
CIRCLING	1580-1 571 (600-1)		1580-1½ 571 (600-1½)	1640-2 631 (700-2)

HIRL all Rwys
TDZL/RCLS Rwy 6L
REIL Rwys 6R and 36

EC-2, 29 OCT 2026 to 26 NOV 2026
EC-2, 29 OCT 2026 to 26 NOV 2026