WAAS	APP CRS	Rwy Ldg	9810
CH 45500	070°	TDZE	30
W07A		Apt Elev	34


RNAV (GPS) RWY 7L
DAYTONA BEACH INTL (DAB)


Inoperative table does not apply to LPV all Cats. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 43°C (109°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾SM NA. For inoperative MALSR, increase LNAV/VNAV visibility all Cats to 1¼ and increase LNAV Cats A/B visibility to RVR 5000 and Cats C/D visibility to RVR 6000.

MALSR

MISSED APPROACH: Climb to 1600 direct GILNE and hold.


ATIS	DAYTONA APP CON	DAYTONA TOWER	GND CON
132.875	125.8 269.075	120.7 257.8	121.9 348.6

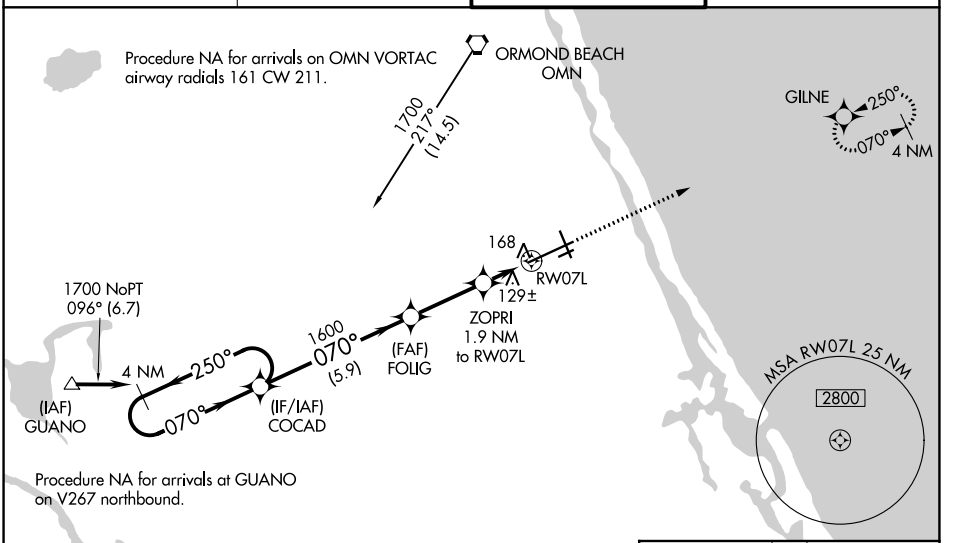

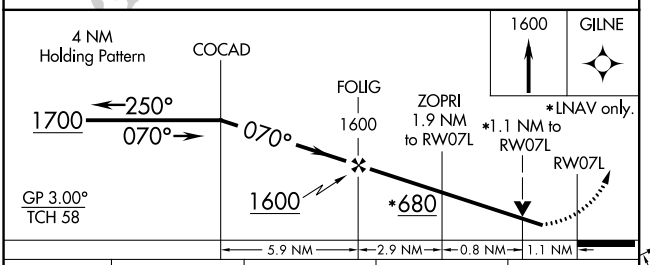

CATEGORY	A	B	C	D
LPV DA	230/40	200 (200-¾)		
LNAV/VNAV DA	429/45	399 (400-⅞)		
LNAV MDA	420/40	390 (400-¾)		
CIRCLING	540-1	506 (600-1)	680-1¾ 646 (700-1¾)	700-2 666 (700-2)

ELEV 34 D TDZE 30



TDZL/RCLS Rwy 7L
HIRL Rwy 7L-25R
REIL Rwys 7R, 16, 25L, and 34
MIRL Rwys 7R-25L and 16-34

SE-3, 29 OCT 2026 to 26 NOV 2026
SE-3, 29 OCT 2026 to 26 NOV 2026