ILS or LOC RWY 31

DES MOINES INTL (DSM)

LOC/DME I-DSM	APP CRS	Rwy Ldg	9001
110.3	311°	TDZE	958
Chan 40		Apt Elev	958

TAKEOFF MINIMUMS: For inop ALS, increase S-ILS 31 Cat E visibility to RVR 4000 and S-LOC 31 Cat E visibility to RVR 6000.

ALSF-2

MISSED APPROACH: Climb to 1600 then climbing left turn to 3000 on heading 180° and on DSM VORTAC R-254 to MIDLE INT/12 DME and hold.

ATIS	DES MOINES APP CON	DES MOINES TOWER	GND CON
119.55	123.9 307.15	118.3 257.8	121.9 348.6

ALTERNATE MISSED APCH FIX

079° 259° 112.5 TNU R-259 Chan 72 ANKEN TNU 22

ANKEN TNU 22

Procedure NA for arrival on TNU VOR/DME airway radials 227 CW 259.

MSA DSM 25 NM

150° 4000 240° 3200

LOCALIZER 110.3 I-DSM Chan 40

NEWTON 112.5 TNU Chan 72

3000 214° (27.9)

116.7 LMN Chan 114 R-356

IM

FOREM INT I-DSM 6

R-214

R-044 2400 311° (6)

MIDLE DSM 12

R-254 3000 094° (7.7)

074° 254°


1 min 131° 311° R-094

DES MOINES 117.5 DSM Chan 122

(IF/IAF) CYCLN INT I-DSM 11.9

Procedure NA for arrival on DSM VORTAC airway radials 042 CW 141.

ELEV 958 D TDZE 958




REIL Rwy 23
TDZL/RCLS Rwy 31
HIRL Rwys 13-31 and 5-23

FAF to MAP 4.4 NM

Knots	60	90	120	150	180
Min:Sec	4:24	2:56	2:12	1:46	1:28

1600 | 3000 hdg 180° | DSM R-254 | MIDLE

One Minute Holding Pattern

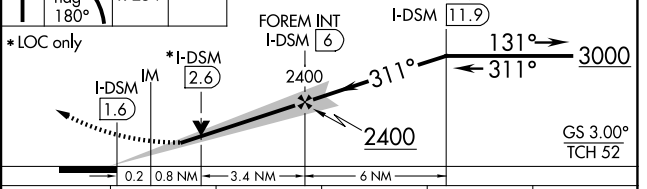

CATEGORY	A	B	C	D	E
S-ILS 31	1158/18 200 (200-½)				
S-LOC 31	1340/24 382 (400-½)		1340/35 382 (400-⅝)		
CIRCLING	1420-1 462 (500-1)		1600-1½ 642 (700-1½)	1760-2½ 802 (900-2½)	1760-2¾ 802 (900-2¾)

NC-3, 29 OCT 2026 to 26 NOV 2026
NC-3, 29 OCT 2026 to 26 NOV 2026