RNAV (GPS) RWY 31

DES MOINES INTL (DSM)

WAAS	APP CRS	Rwy Ldg	9001
CH 78002	311°	TDZE	958
W31A		Apt Elev	958


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20° or above 54°. For inop ALS, increase LNAV Cats C/D visibility to RVR 5500. Baro-VNAV and VDP NA when using Ankeny Rgnl altimeter setting.


ALSF-2

MISSED APPROACH: Climb to 3500 direct WATTY and hold.


ATIS	DES MOINES APP CON	DES MOINES TOWER	GND CON
119.55	123.9 307.15	118.3 257.8	121.9 348.6

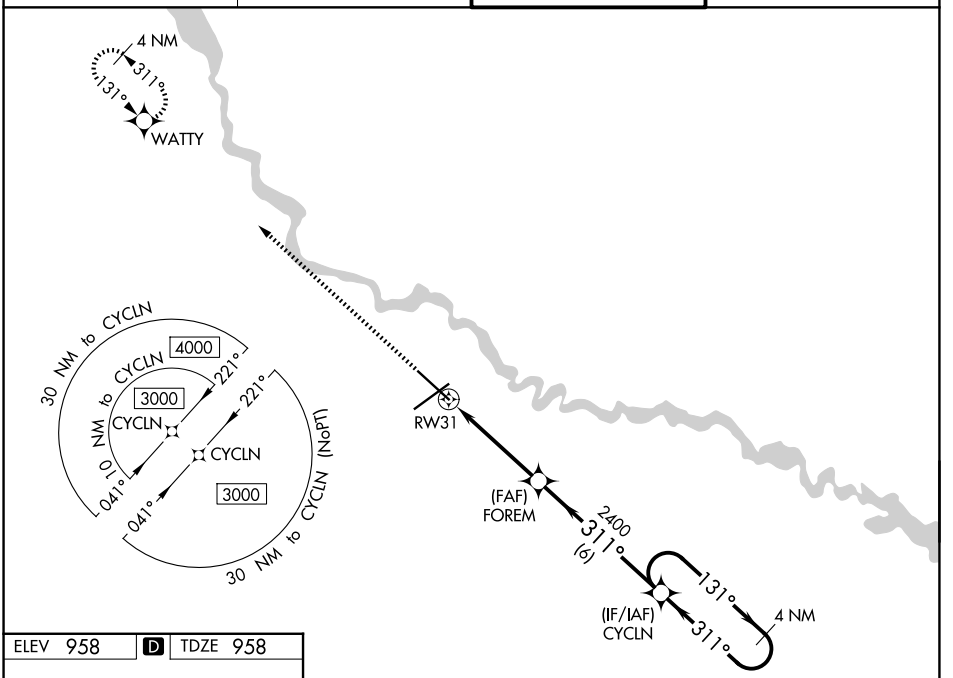

ELEV 958 D TDZE 958



REIL Rwy 23
TDZL/RCLS Rwy 31
HIRL Rwys 13-31 and 5-23

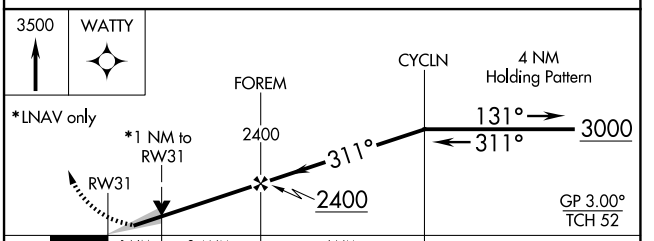

CATEGORY	A	B	C	D
LPV DA	1158/18 200 (200-½)			
LNAV/VNAV DA	1354/35 396 (400-⅝)			
LNAV MDA	1320/24 362 (400-½)		1320/35 362 (400-⅝)	
CIRCLING	1420-1 462 (500-1)		1600-1¾ 642 (700-1¾)	1760-2½ 802 (900-2½)

NC-3, 29 OCT 2026 to 26 NOV 2026
NC-3, 29 OCT 2026 to 26 NOV 2026