ILS or LOC RWY 6

ELMIRA/CORNING RGNL (ELM)

LOC I-UEK	APP CRS	Rwy Ldg	7401
109.1	062°	TDZE	944
		Apt Elev	955

RADAR required to define JOKEN, CONAC. RNAV 1-GPS required for procedure entry. RNAV 1-GPS required from MAP to IREKE.


Inop table does not apply to S-LOC 6 Cats C/D. Circling NA to Rwys 5 and 23. Circling NA for Cat D south of Rwys 10 and 28. Circling Rwy 10 NA at night. For inop ALS, increase S-LOC 6 CONAC fix minimums Cats C/D visibility to 2½ SM. -21°C


** RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 4000 direct IREKE/RADAR and hold.

ATIS	ELMIRA APP CON★	ELMIRA TOWER★	GND CON	UNICOM
125.475	128.425 257.8	121.1 (CTAF) L 257.8	121.9	122.95

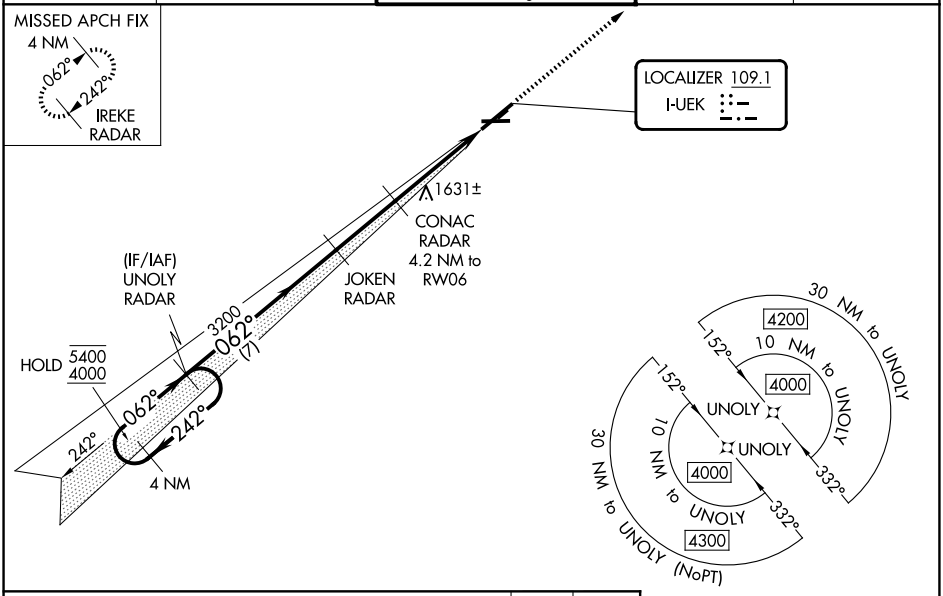

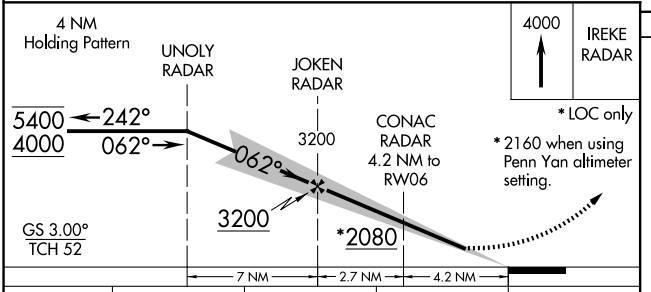


CATEGORY	A	B	C	D
S-ILS 6**	1144/24 200 (200-½)			
S-LOC 6	2080/40 1136 (1200-¾)	2080/55 1136 (1200-1)	2080-3 1136 (1200-3)	
CIRCLING	2080-1¼ 1125 (1200-1¼)	2080-1½ 1125 (1200-1½)	2100-3 1145 (1200-3)	2340-3 1385 (1400-3)
CONAC FIX MINUMUMS				
S-LOC 6	1740/24 796 (800-½)	1740/40 796 (800-¾)	1740-1¾ 796 (800-1¾)	
CIRCLING	2020-1¼ 1065 (1100-1¼)	2080-1½ 1125 (1200-1½)	2100-3 1145 (1200-3)	2340-3 1385 (1400-3)

ELEV 955 D TDZE 944

HIRL Rwy 6-24 L

MIRL Rwy 10-28 L



FAF to MAP 6.9 NM

Knots	60	90	120	150	180
Min:Sec	6:54	4:36	3:27	2:46	2:18

NE-2, 29 OCT 2026 to 26 NOV 2026
NE-2, 29 OCT 2026 to 26 NOV 2026