RNAV (RNP) Z RWY 22

EL PASO INTL (ELP)

APP CRS	Rwy Ldg	12020
222°	TDZE	3950
	Apt Elev	3962


RNP AR APCH.

ASR For uncompensated Baro-VNAV systems, procedure NA below -8°C or above 54°C. For inop ALS, increase RNP 0.10 all Cats visibility to RVR 4000 and RNP 0.30 all Cats visibility to RVR 4500.

MALSR (A5)

MISSED APPROACH: Climb to 4400 then climbing left turn to 7500 direct FABAN and hold.


D-ATIS	EL PASO APP CON	EL PASO TOWER	GND CON
120.0 254.3	124.25 298.85	118.3 239.275	121.9 348.6

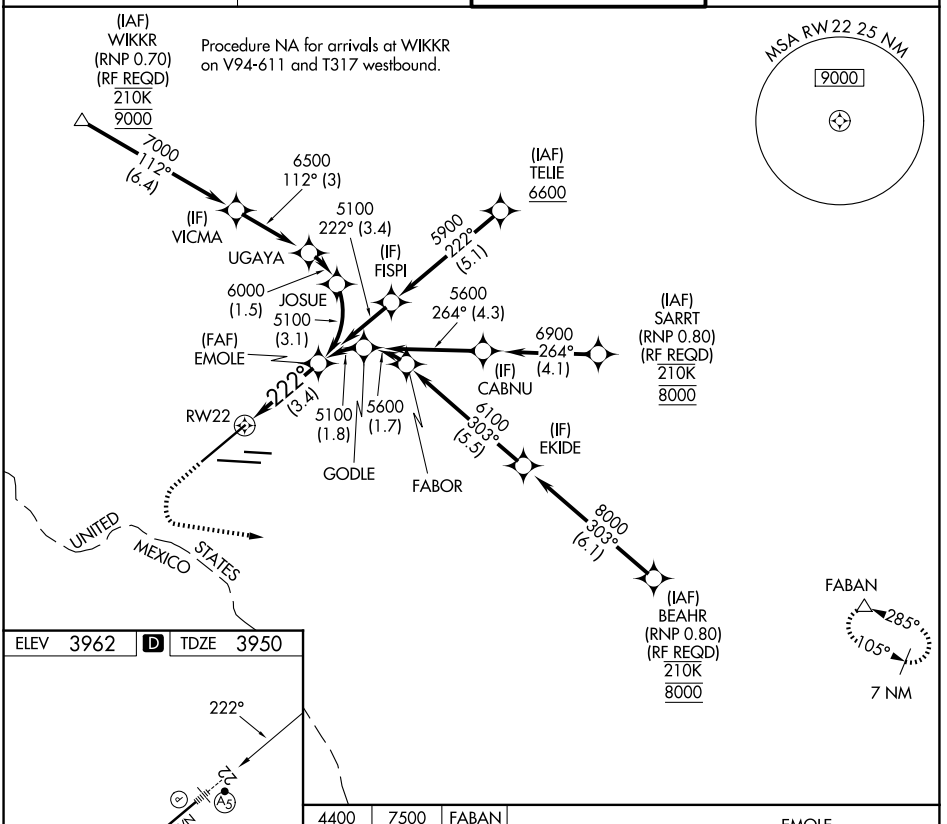


SC-3, 29 OCT 2026 to 26 NOV 2026

SC-3, 29 OCT 2026 to 26 NOV 2026

ELEV 3962 D TDZE 3950



MIRL Rwy 8L-26R
REIL Rwys 4 and 8R
HIRL Rwys 4-22 and 8R-26L

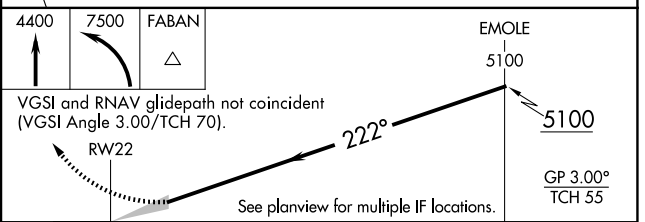

CATEGORY	A	B	C	D
RNP 0.10 DA	4200/24		250 (300-½)	
RNP 0.30 DA	4270/27		320 (400-⅝)	

AUTHORIZATION REQUIRED