RNAV (GPS) Y RWY 26L

EL PASO INTL (ELP)

WAAS	APP CRS	Rwy Ldg	9025
CH 40223	265°	TDZE	3962
W26A		Apt Elev	3962

RNP APCH-GPS.


Circling NA for Cat D west of Rwy 4-22. For inop ALS, increase LP and LNAV Cat A/B visibility to 1 SM, and Cat C/D to 1⅛ SM.

ASR


MALSR

MISSED APPROACH: Climb to 4380 then climbing right turn to 7500 direct FABAN and hold.

D-ATIS	EL PASO APP CON	EL PASO TOWER	GND CON
120.0 254.3	124.25 298.85	118.3 239.275	121.9 348.6

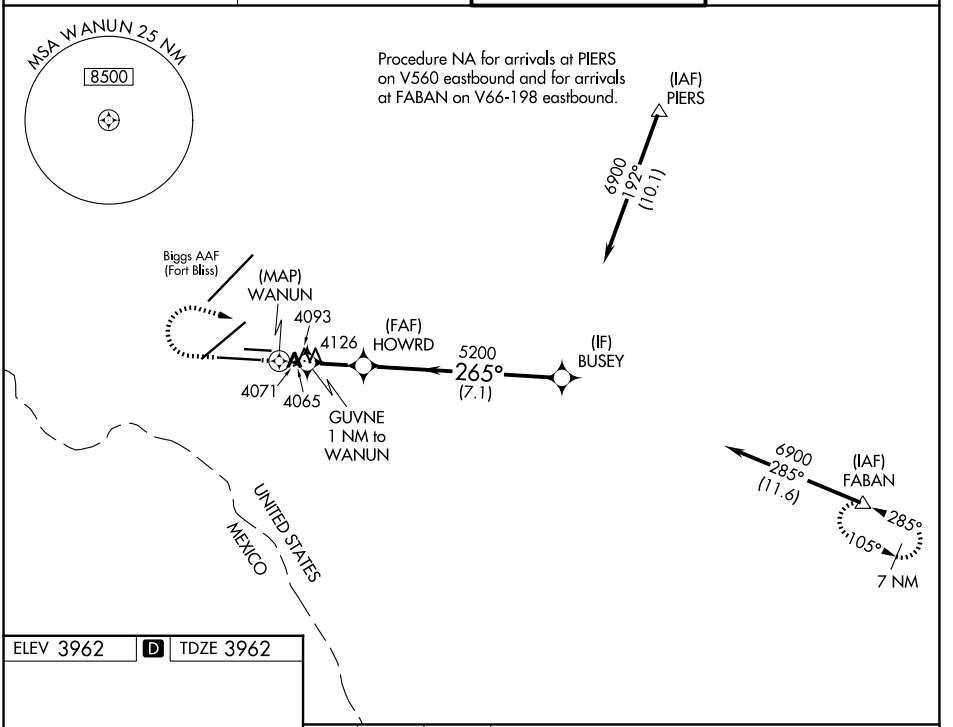


ELEV 3962 | D | TDZE 3962



MIRL Rwy 8L-26R
REIL Rwys 4 and 8R
HIRL Rwys 4-22 and 8R-26L

4380	7500	FABAN

VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 75).

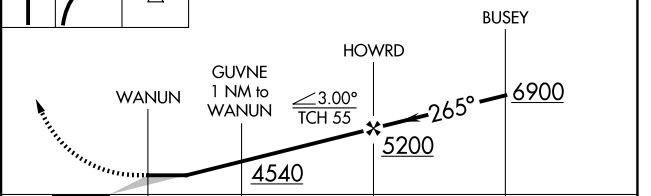

CATEGORY	A	B	C	D
LP MDA	4380-¾ 418 (500-¾)			
LNAV MDA	4380-¾ 418 (500-¾)			
CIRCLING	4420-1 458 (500-1)	4440-1 478 (500-1)	4480-1½ 518 (600-1½)	4680-2¼ 718 (800-2¼)

SC-3, 29 OCT 2026 to 26 NOV 2026
SC-3, 29 OCT 2026 to 26 NOV 2026