RNAV (GPS) RWY 13

ENID WOODRING RGNL(WDG)


WAAS CH 42947 W13A	APP CRS 130°	Rwy Ldg 3038 TDZE 1159 Apt Elev 1167


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Baro-VNAV and VDP NA when using GOK altimeter setting. When local altimeter setting not recieved, use GOK altimeter setting and increase LPV DA to 1507 feet and all visibilities ¼SM. Increase LNAV/VNAV DA to 1523 feet and all visibilities ⅛SM. Increase all MDAs 100 feet and LNAV visibility Cat C ¼SM, and Circling visibility Cat C ½SM.


MISSED APPROACH: Climb to 3000 direct RDGRS and hold.

AWOS-3PT	VANCE APP CON★	WOODRING TOWER★	GND CON
123.725	121.3 346.325	118.9 (CTAF) L 257.95	121.925

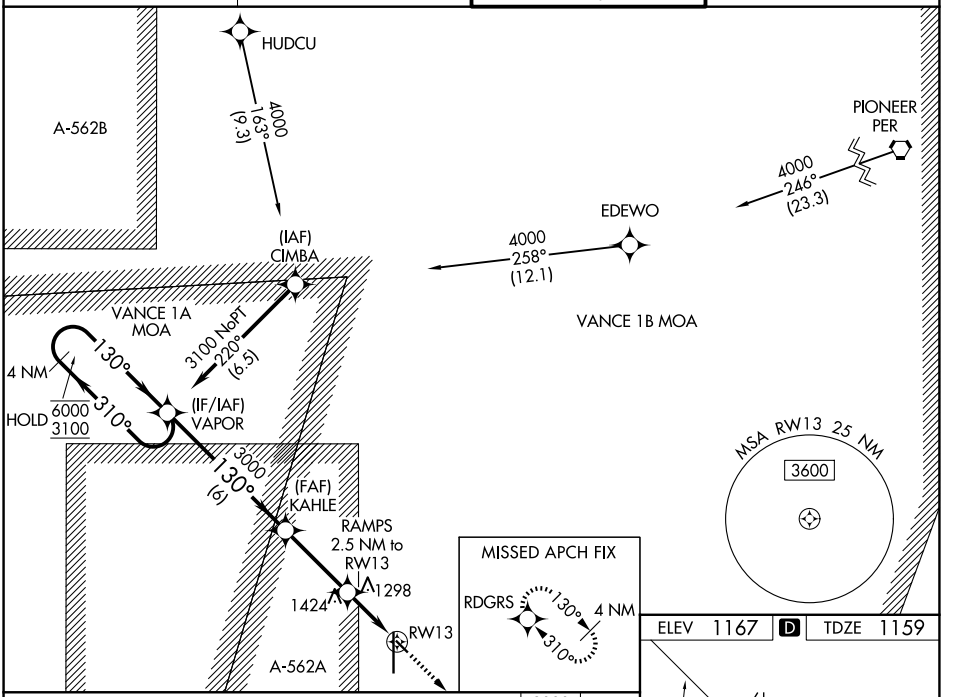

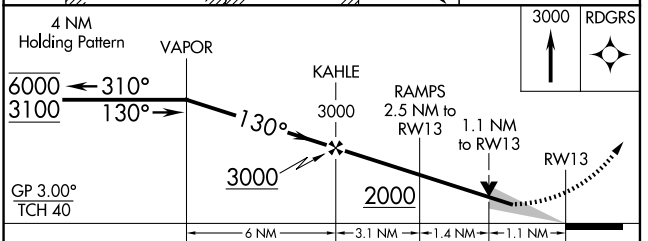

CATEGORY	A	B	C	D
LPV DA	1409-¾	250 (300-¾)		NA
LNAV/VNAV DA	1425-⅞	266 (300-⅞)		NA
LNAV MDA	1560-1	401 (400-1)	1560-1⅛ 401 (400-1⅛)	NA
CIRCLING	1760-1	593 (600-1)	1820-1¾ 653 (700-1¾)	NA

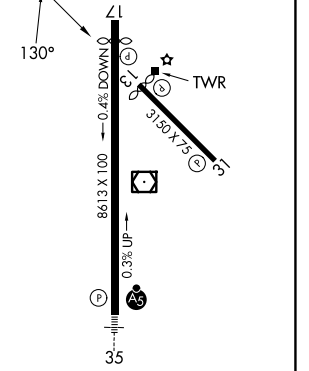

REIL Rwy 17 L
MIRL Rwy 13-31 and 17-35 L

SC-1, 29 OCT 2026 to 26 NOV 2026
SC-1, 29 OCT 2026 to 26 NOV 2026