RNAV (GPS) RWY 31

ENID WOODRING RGNL (WDG)


WAAS	APP CRS	Rwy Ldg	3038
CH 87147	310°	TDZE	1159
W31A		Apt Elev	1167


RNP APCH - GPS.


T A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Baro-VNAV and VDP NA when using GOK altimeter setting. When local altimeter setting not received, use GOK altimeter setting and increase LPV DA to 1507 feet and all visibilities ¼ SM. Increase LNAV/VNAV DA to 1707 feet and all visibilities ¼ SM. Increase all MDAs 100 feet and LNAV visibility Cat C ¼ SM, and Circling visibility Cat C ½ SM.

MISSED APPROACH: Climb to 1700 then climbing right turn to 4000 direct EDEWO and hold.

AWOS-3PT	VANCE APP CON ★	WOODRING TOWER ★	GND CON
123.725	121.3 346.325	118.9 (CTAF) L 257.95	121.925

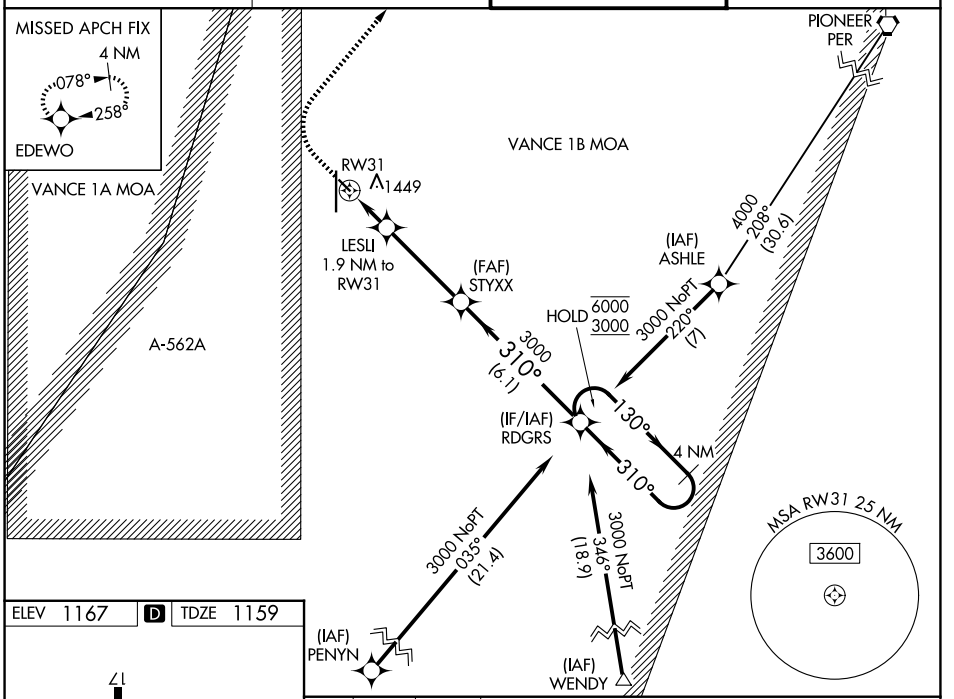

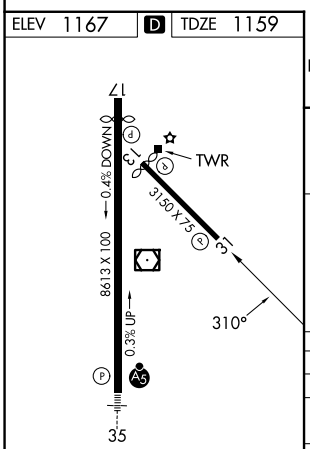

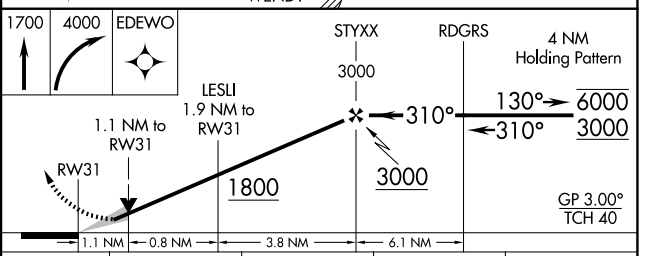

CATEGORY	A	B	C	D
LPV DA	1409-¾ 250 (300-¾)			NA
LNAV/VNAV DA	1609-1⅜ 450 (500-1⅜)			NA
LNAV MDA	1560-1 401 (400-1)		1560-1⅛ 401 (400-1⅛)	NA
CIRCLING	1760-1 593 (600-1)		1820-1¾ 653 (700-1¾)	NA

REIL Rwy 17 L
MIRL Rwy 13-31 and 17-35 L

SC-1, 29 OCT 2026 to 26 NOV 2026
SC-1, 29 OCT 2026 to 26 NOV 2026