ILS or LOC RWY 28L

CHICAGO O'HARE INTL (ORD)

LOC/DME I-VQX	APP CRS	Rwy Ldg	7500
110.75	274°	TDZE	667
Chan 44(Y)		Apt Elev	680

Aircraft not GPS equipped - RADAR required for procedure entry. DME or RADAR required.


From VOGLR: RNAV 1-GPS required.

Simultaneous approach authorized.

ALSF-2

MISSED APPROACH: Climb to 1200 then climbing left turn to 4000 direct CGT VORTAC and hold.


D-ATIS	CHICAGO APP CON	O'HARE TOWER	GND CON	(TWR CENTER)
135.4 282.225	119.0 292.125	133.0 348.0	124.125 (TWR NORTH) 118.05 (TWR SOUTH) 226.675 (ALL TWRS)	121.75 (OBND) 121.9 (IBND)

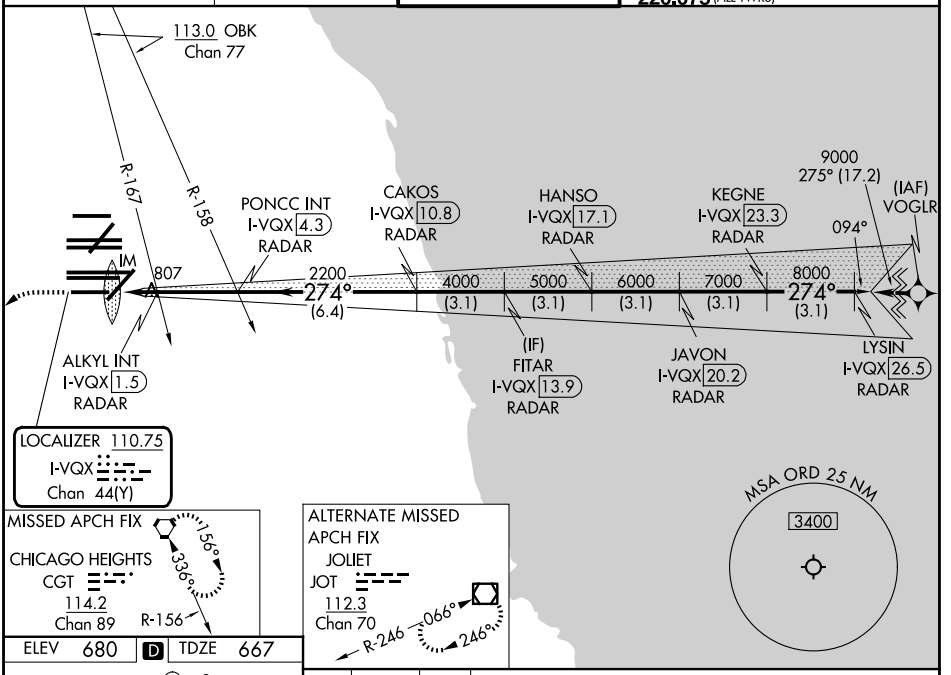

MISSED APCH FIX
CHICAGO HEIGHTS
CGT
114.2
Chan 89
156°
336°
R-156

ALTERNATE MISSED APCH FIX
JOLIET
JOT
112.3
Chan 70
R-246
066°
246°


ELEV 680 | D | TDZE 667

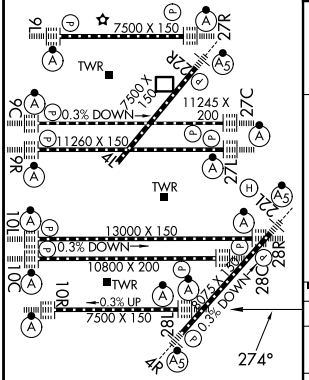

HIRL all rwys
TDZL/RCLS all rwys except 4L

FAF to MAP 4.7 NM

Knots	60	90	120	150	180
Min:Sec	4:42	3:08	2:21	1:53	1:34

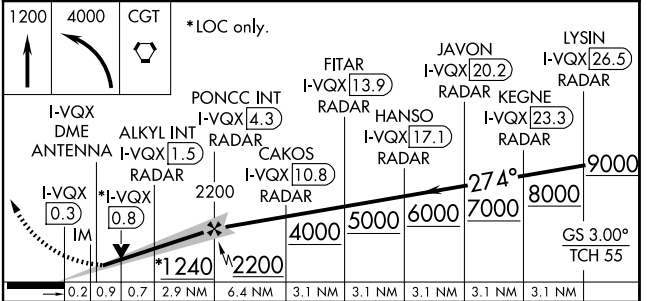

CATEGORY	A	B	C	D
S-ILS 28L	867/18 200 (200-½)			
S-LOC 28L	1240/24 573 (600-½)		1240-1¼ 573 (600-1¼)	
ALKYL FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED)				
S-LOC 28L	1060/24 393 (400-½)		1060/35 393 (400-⅝)	

EC-3, 29 OCT 2026 to 26 NOV 2026
EC-3, 29 OCT 2026 to 26 NOV 2026