ILS Y or LOC Y RWY 10R

CHICAGO O'HARE INTL (ORD)

LOC/DME I-BYW	APP CRS	Rwy Ldg	7500
110.9	091°	TDZE	680
Chan 46		Apt Elev	680

RNAV 1-GPS or RADAR required for procedure entry. DME or RADAR required.
From GIBNS: RNAV-1 GPS required.
Simultaneous approach authorized.

ALSF-2

MISSED APPROACH: Climb to 1200 then climbing right turn to 4000 direct DPA VOR/DME and hold.

D-ATIS	CHICAGO APP CON	O'HARE TOWER	GND CON (TWR CENTER)
135.4 282.225	119.0 292.125	133.0 348.0	124.125 (TWR NORTH) 121.75 (OBND) 118.05 (TWR SOUTH) 121.9 (IBND) 226.675 (ALL TWRS)

ALTERNATE MISSED APCH FIX
JOLIET
JOT
112.3
Chan 70
R-246 066° 246°


MSA ORD 25 NM
3400
113.0 OBK Chan 77
R-195
R-185

(IAF) GIBNS
FERLL I-BYW 27.8 RADAR
MLSEN I-BYW 24.7 RADAR
OLLGA I-BYW 21.5 RADAR
LEATH I-BYW 18.4 RADAR
(IF) GOOZY I-BYW 15.3 RADAR
KVENN I-BYW 12.1 RADAR
FLLYN INT I-BYW 6.6 RADAR
TRUFL INT I-BYW 3.5
WUGIX I-BYW 2.1

271° 8000 091° (3.1) 7000 (3.1) 6000 (3.1) 5000 (3.1) 4000 (3.1) 2300 091° (5.6)
852
9000 087° (20.1)
R-248 068° 248°

DUPAGE
114.55 DPA
Chan 92(Y)

LOCALIZER 110.9
I-BYW
Chan 46
LOC offset 2.50°

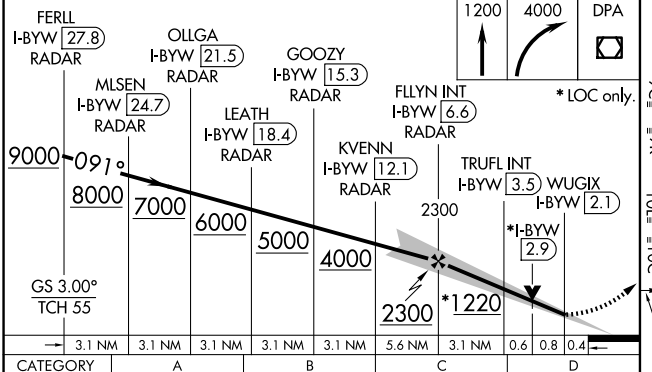


CATEGORY	A	B	C	D
S-ILS 10R	930/24 250 (300-½)			
S-LOC 10R	1220/24 540 (600-½)		1220/55 540 (600-1)	

TRUFL FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED)

S-LOC 10R	1120/24 440 (500-½)	1120/40 440 (500-¾)	

ELEV 680 D TDZE 680

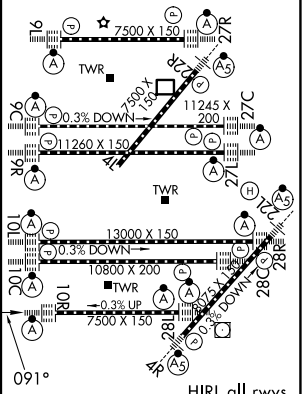

HIRL all rwys
TDZL/RCLS all rwys except 4L

FAF to MAP 4.5 NM

Knots	60	90	120	150	180
Min:Sec	4:30	3:00	2:15	1:48	1:30

EC-3, 29 OCT 2026 to 26 NOV 2026
EC-3, 29 OCT 2026 to 26 NOV 2026