WAAS	APP CRS	Rwy Ldg	12246
CH 48904	093°	TDZE	672
W10A		Apt Elev	680

RNAV (GPS) RWY 10L
CHICAGO O'HARE INTL (ORD)


RADAR required for procedure entry. RNP APCH.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.


ALSF-2

MISSED APPROACH: Climb to 4000 direct XURXU and on track 161° to CGT VORTAC and hold.

D-ATIS	CHICAGO APP CON	O'HARE TOWER	GND CON	(TWR CENTER)
135.4 282.225	119.0 292.125	132.7 348.0	124.125 (TWR NORTH) 118.05 (TWR SOUTH) 226.675 (ALL TWRS)	121.75 (OBND) 121.9 (IBND)

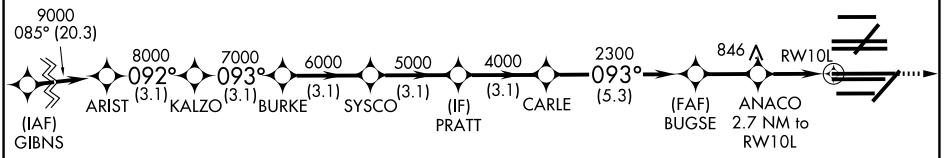






ELEV	680	D	TDZE	672


VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 74).

4000	XURXU	tr 161°	CGT

* LNAV only.

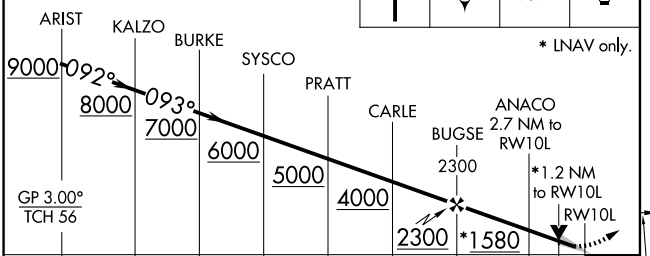

CATEGORY	A	B	C	D
LPV DA	872/18	200 (200-½)		
LNAV/VNAV DA	1062/35	390 (400-⅝)		
LNAV MDA	1120/24	448 (500-½)	1120/45	448 (500-⅞)

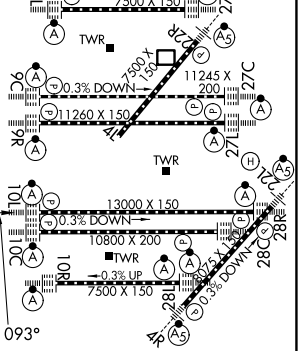

HIRL all rwys
TDZL/RCLS all rwys except 4L

EC-3, 29 OCT 2026 to 26 NOV 2026
EC-3, 29 OCT 2026 to 26 NOV 2026