RNAV (GPS) RWY 22R

CHICAGO O'HARE INTL (ORD)

WAAS CH 90504 W22A	APP CRS 223°	Rwy Ldg 7300 TDZE 652 Apt Elev 680


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C (-7°F) or above 39°C (102°F). Simultaneous approach authorized with Rwy 22L. DME/DME RNP-0.3 NA. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.


MALSR

MISSED APPROACH: Climb to 4000 direct EVRSN and on track 263° to DPA VOR/DME and hold.


D-ATIS	CHICAGO APP CON	O'HARE TOWER	GND CON (TWR NORTH)	GND CON (TWR SOUTH)	GND CON (ALL TWRS)	(TWR CENTER)
135.4 282.225	119.0 292.125	126.9 348.0	124.125	118.05	226.675	121.75 (OBND) 121.9 (IBND)

RADAR REQUIRED

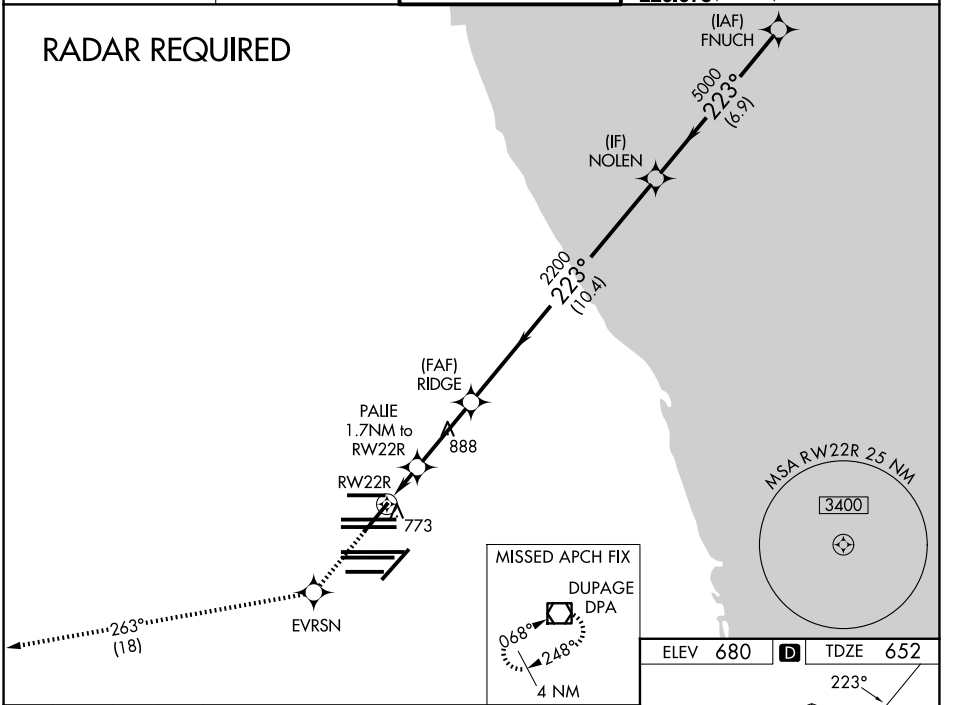

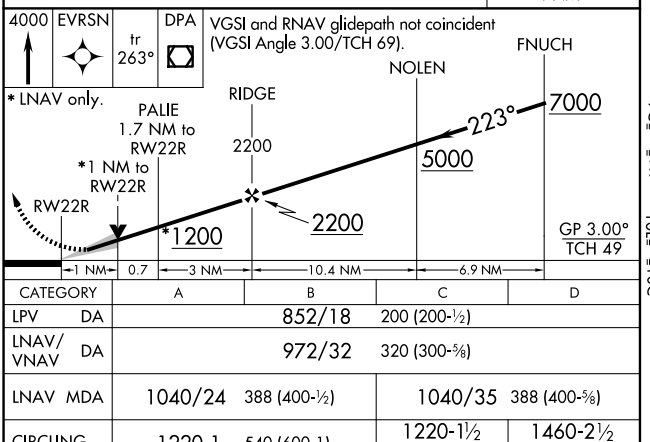

CATEGORY	A	B	C	D
LPV DA		852/18	200 (200-½)	
LNAV/VNAV DA		972/32	320 (300-⅝)	
LNAV MDA	1040/24	388 (400-½)	1040/35	388 (400-⅝)
CIRCLING	1220-1	540 (600-1)	1220-1½ 540 (600-1½)	1460-2½ 780 (800-2½)

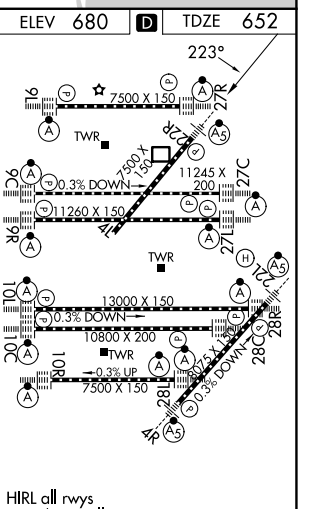

HIRL all rwys
TDZL/RCLS all rwys except 4L

EC-3, 29 OCT 2026 to 26 NOV 2026
EC-3, 29 OCT 2026 to 26 NOV 2026