WAAS	APP CRS	Rwy Ldg 11245
CH 70643	273°	TDZE 653
W27D		Apt Elev 680

RNAV (GPS) RWY 27C

CHICAGO O'HARE INTL (ORD)


RNP APCH.

T Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. For inop ALS, increase LNAV Cat C/D visibility to RVR 6000.

ALSF-2

MISSED APPROACH: Climb to 1100 then climbing right turn to 4000 direct UKUNE and hold.


D-ATIS	CHICAGO APP CON	O'HARE TOWER	GND CON	(TWR CENTER)
135.4 282.225	119.0 292.125	121.15 348.0	124.125 (TWR NORTH) 118.05 (TWR SOUTH) 226.675 (ALL TWRS)	121.75 (OBND) 121.9 (IBND)

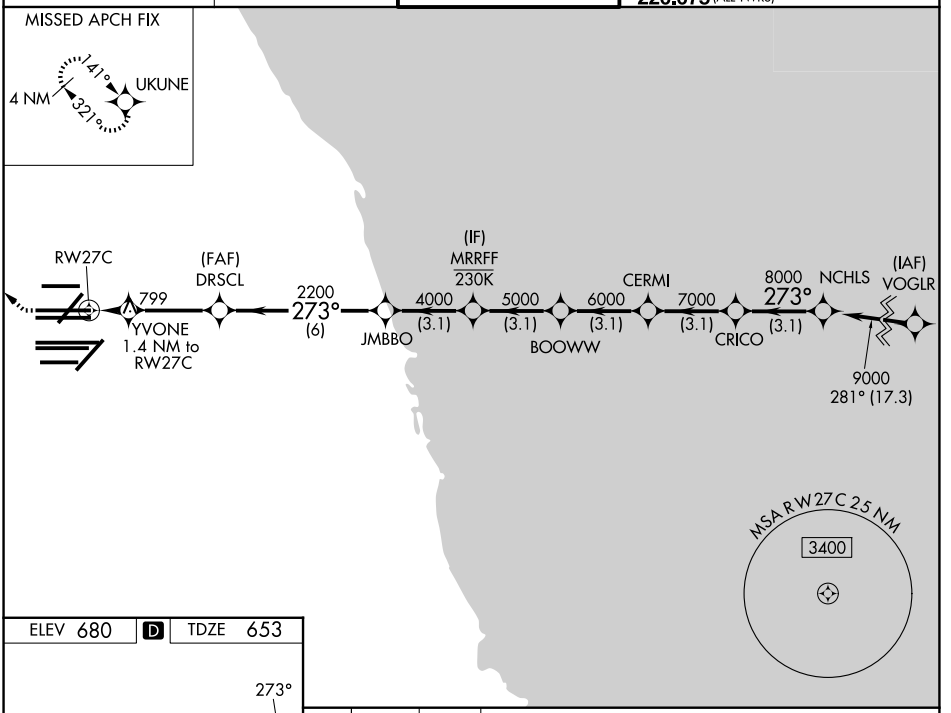


EC-3, 29 OCT 2026 to 26 NOV 2026

EC-3, 29 OCT 2026 to 26 NOV 2026

ELEV 680 D TDZE 653

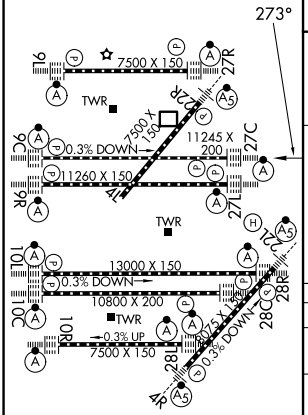

HIRL all rwys
TDZL/RCLS all rwys except 4L

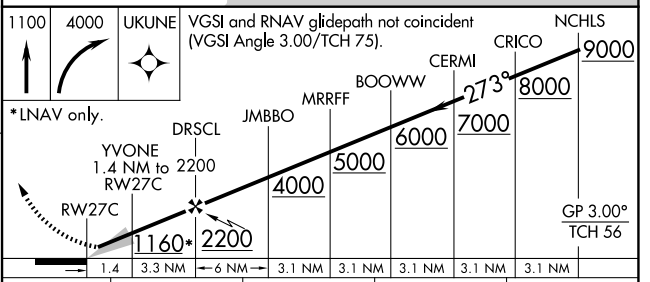

CATEGORY	A	B	C	D
LPV DA	853/18 200 (200-½)			
LNAV/VNAV DA	1086/40 433 (500-¾)			
LNAV MDA	1060/24 407 (400-½)		1060/40 407 (400-¾)	