WAAS	APP CRS	Rwy Ldg	10800
CH 42634	273°	TDZE	651
W28B		Apt Elev	680

RNAV (GPS) RWY 28C

CHICAGO O'HARE INTL (ORD)


DME/DME RNP-0.3 NA. Simultaneous approach authorized. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C (-2°F) or above 54°C (130°F). LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations. For inop ALSF, increase LNAV Cat C and D visibility to RVR 6000.

ALSF-2


MISSED APPROACH: Climb to 1100 then climbing left turn to 4000 direct DPA VOR/DME and hold.


D-ATIS	CHICAGO APP CON	O'HARE TOWER	GND CON	(TWR CENTER)
135.4 282.225	119.0 292.125	120.75 348.0	124.125 (TWR NORTH) 118.05 (TWR SOUTH) 226.675 (ALL TWRS)	121.75 (OBND) 121.9 (IBND)

RADAR REQUIRED

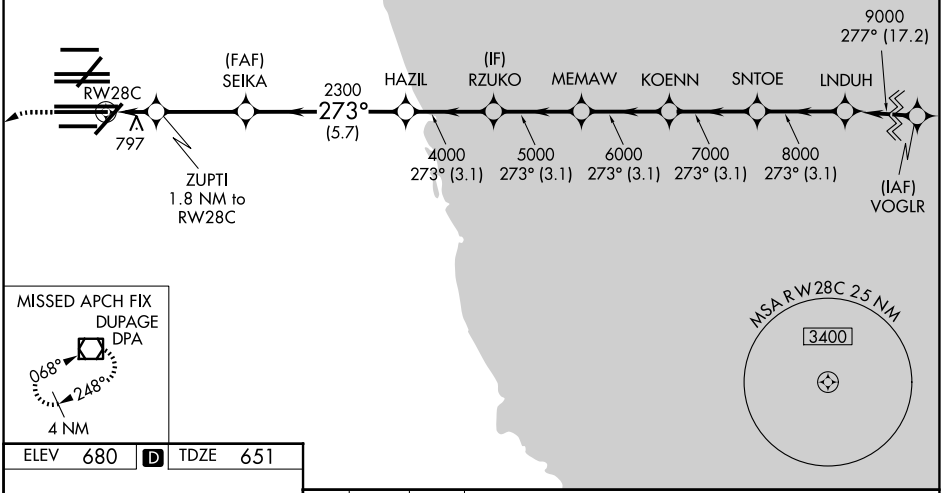

ELEV 680 D TDZE 651

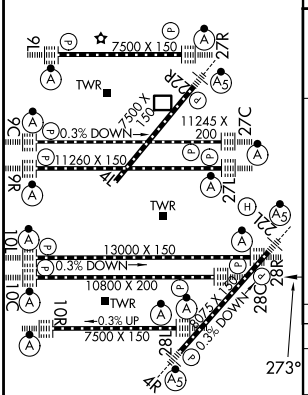

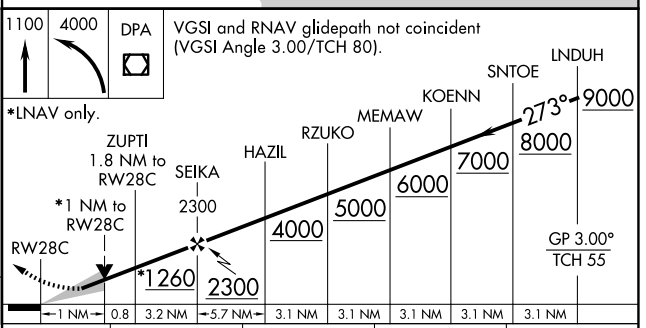

CATEGORY	A	B	C	D
LPV DA	851/18 200 (200-½)			
LNAV/VNAV DA	1094/50 443 (500-1)			
LNAV MDA	1060/24 409 (400-½)		1060/40 409 (400-¾)	

EC-3, 29 OCT 2026 to 26 NOV 2026
EC-3, 29 OCT 2026 to 26 NOV 2026