WAAS	APP CRS	Rwy Ldg	7500
CH 99508	093°	TDZE	668
W09B		Apt Elev	680

RNAV (GPS) RWY 9L
CHICAGO O'HARE INTL (ORD)


RADAR required for procedure entry. RNP APCH.

Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations. For uncompensated Baro-VNAV systems, procedure NA below -19°C or above 54°C.


ALSF-2


MISSED APPROACH: Climb to 1100 then climbing left turn to 4000 direct OBK VOR/DME and hold, continue climb-in-hold to 4000.

D-ATIS	CHICAGO APP CON	O'HARE TOWER	GND CON	(TWR CENTER)
135.4 282.225	119.0 292.125	128.15 348.0	124.125 (TWR NORTH)	121.75 (OBND)
			118.05 (TWR SOUTH)	121.9 (IBND)
			226.675 (ALL TWRS)	






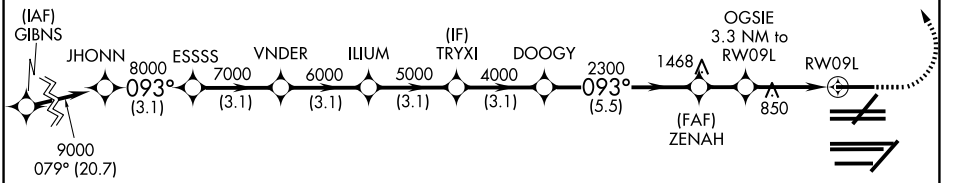

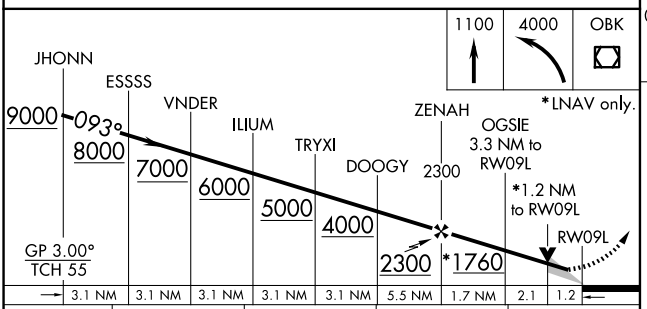

CATEGORY	A	B	C	D
LPV DA	868/18 200 (200-½)			
LNAV/VNAV DA	1034/35 366 (400-⅝)			
LNAV MDA	1100/24 432 (500-½)		1100/40 432 (500-¾)	

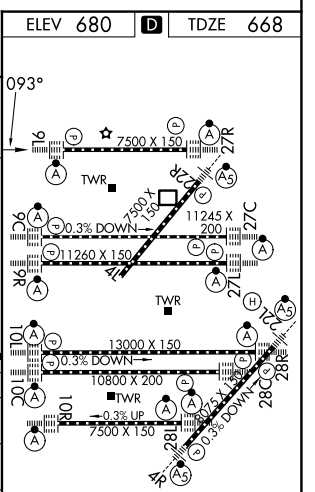

EC-3, 29 OCT 2026 to 26 NOV 2026
EC-3, 29 OCT 2026 to 26 NOV 2026