CHICAGO, ILLINOIS

AL-166 (FAA)

RNAV (GPS) PRM RWY 28C (CLOSE PARALLEL)

CHICAGO O'HARE INTL (ORD)

WAAS	APP CRS	Rwy Ldg 10800
CH 53639	273°	TDZE 651
W28B		Apt Elev 680


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C (-2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Use of FD or AP providing RNAV track guidance required during simultaneous operations. Simultaneous approach authorized. Dual VHF comm required. See additional requirements on AAUP.


ALSF-2


MISSED APPROACH: Climb to 1100 then climbing left turn to 4000 direct DPA VOR/DME and hold.

D-ATIS	CHICAGO APP CON	O'HARE TOWER	GND CON	(TWR CENTER)
135.4 282.225	119.0 292.125	120.75 348.0	124.125 (TWR NORTH)	121.75 (OBND)
		PRM 119.625	118.05 (TWR SOUTH)	121.9 (IBND)
			226.675 (ALL TWRS)	


RADAR REQUIRED

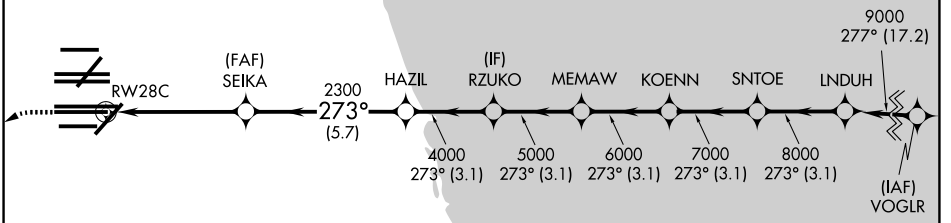






ELEV 680 D TDZE 651

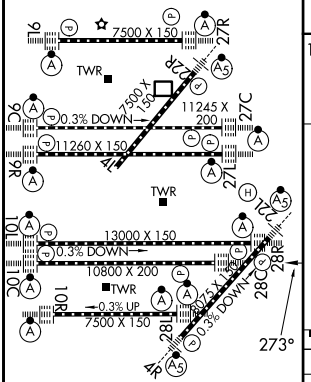

HIRL all rwys
TDZL/RCLS all rwys except 4L

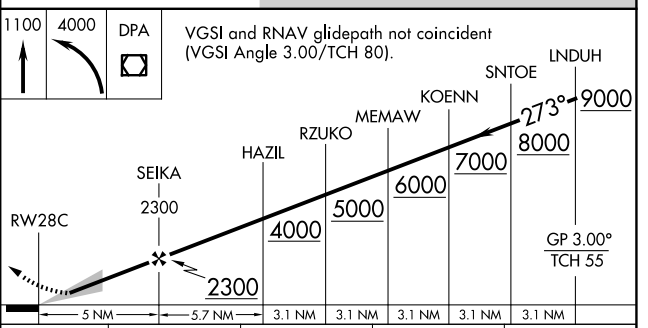

CATEGORY	A	B	C	D
LPV DA	851/18	200 (200-½)		
LNAV/VNAV DA	1094/50	443 (500-1)		

EC-3, 29 OCT 2026 to 26 NOV 2026
EC-3, 29 OCT 2026 to 26 NOV 2026