CHICAGO, ILLINOIS

RNAV (GPS) PRM Y RWY 10R

(CLOSE PARALLEL)

CHICAGO O'HARE INTL (ORD)

WAAS	APP CRS	Rwy Ldg	7500
CH 77937	090°	TDZE	680
W10D		Apt Elev	680


RNP APCH.


T Simultaneous approach authorized. Dual VHF comm required. See additional requirements on AAUP. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. Use of FD or AP providing RNAV track guidance required during simultaneous operations. For inop ALS, increase LNAV/VNAV all Cats visibility to 1⅜ SM.

ALSF-2


MISSED APPROACH: Climb to 1200 then climbing right turn to 4000 direct DPA VOR/DME and hold.

D-ATIS	CHICAGO APP CON	O'HARE TOWER	GND CON	(TWR CENTER)
135.4 282.225	119.0 292.125	133.0 348.0	124.125 (TWR NORTH)	121.75 (OBND)
		PRM 128.05	118.05 (TWR SOUTH)	121.9 (IBND)
			226.675 (ALL TWRS)	

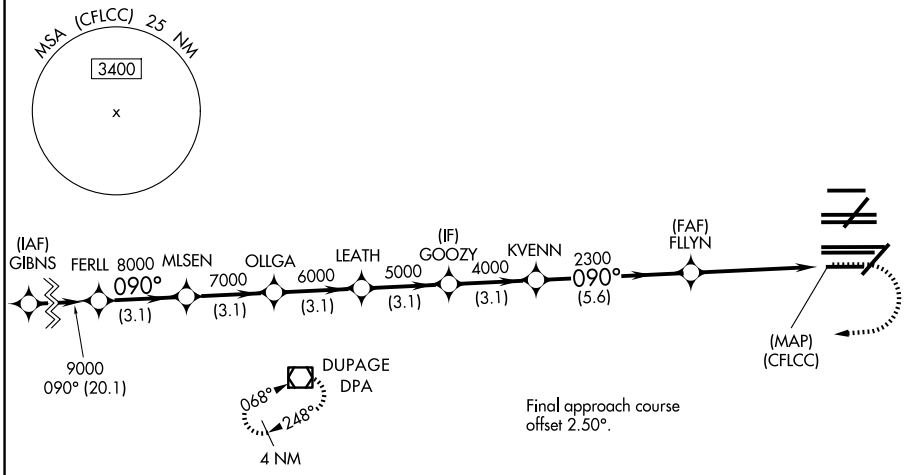

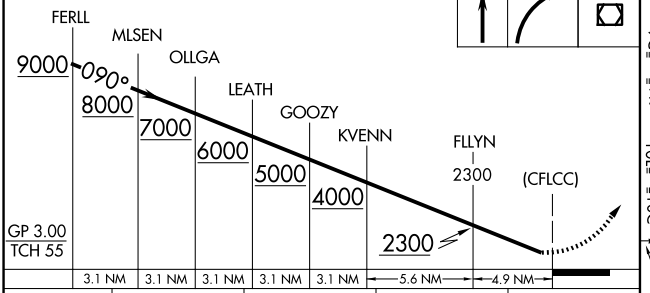

CATEGORY		A	B	C	D
LPV	DA	930/24	250 (300-½)		
LNAV/VNAV	DA	1157/50	477 (500-1)		

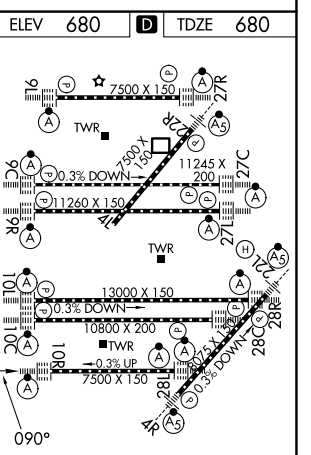

EC-3, 29 OCT 2026 to 26 NOV 2026

EC-3, 29 OCT 2026 to 26 NOV 2026