WAAS	APP CRS	Rwy Ldg	7500
CH 77937	090°	TDZE	680
W10D		Apt Elev	680

RNAV (GPS) Y RWY 10R

CHICAGO O'HARE INTL (ORD)


RNP APCH.


Simultaneous approach authorized. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C.
LNAV procedure NA during simultaneous operations.
Use of FD or AP providing RNAV track guidance required during simultaneous operations.
For inop ALS, increase LNAV/VNAV all Cats visibility to 1⅜ SM.

ALSF-2


MISSED APPROACH: Climb to 1200 then climbing right turn to 4000 direct DPA VOR/DME and hold.

D-ATIS	CHICAGO APP CON	O'HARE TOWER	GND CON	(TWR CENTER)
135.4 282.225	119.0 292.125	133.0 348.0	124.125 (TWR NORTH) 118.05 (TWR SOUTH) 226.675 (ALL TWRS)	121.75 (OBND) 121.9 (IBND)

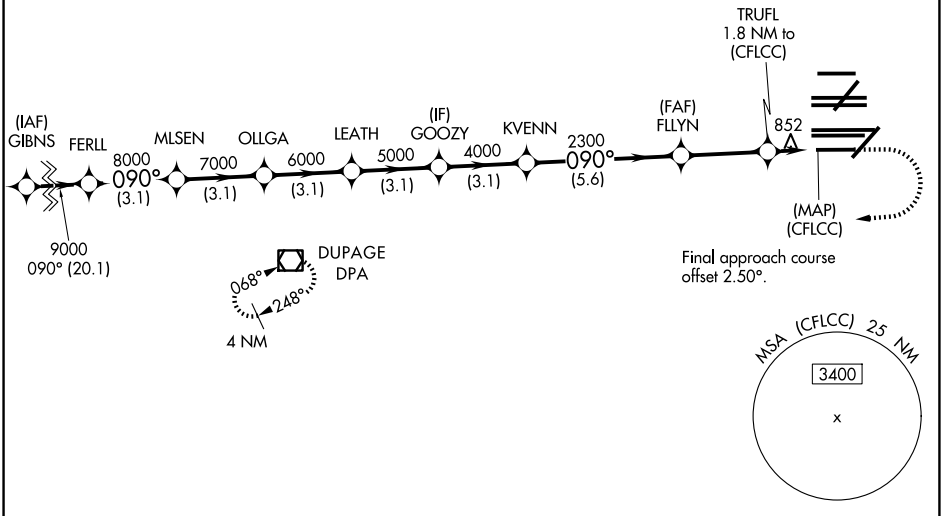

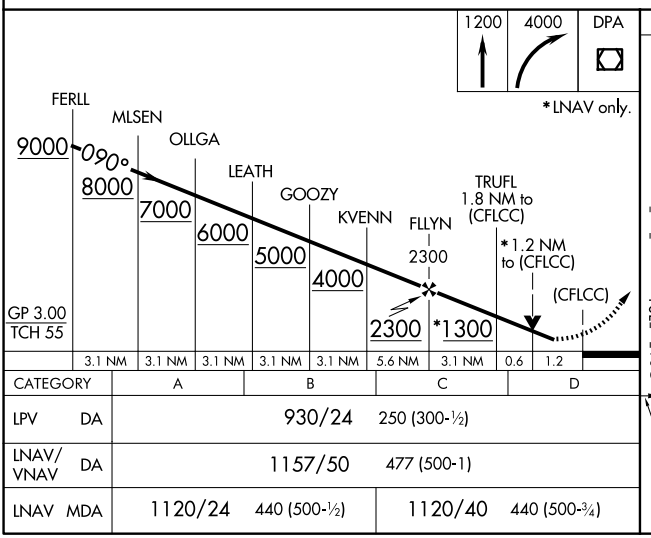

CATEGORY	A	B	C	D
LPV DA	930/24 250 (300-½)			
LNAV/VNAV DA	1157/50 477 (500-1)			
LNAV MDA	1120/24 440 (500-½)		1120/40 440 (500-¾)	

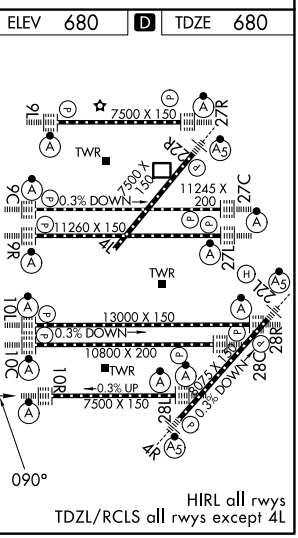

EC-3, 29 OCT 2026 to 26 NOV 2026
EC-3, 29 OCT 2026 to 26 NOV 2026