RNAV (GPS) Y RWY 28L

CHICAGO O'HARE INTL (ORD)

WAAS	APP CRS	Rwy Ldg	7500
CH 93839	275°	TDZE	667
W28E		Apt Elev	680


RNP APCH.


T Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. Use of FD or AP required during simultaneous operations.

ALSF-2


MISSED APPROACH: Climb to 1200 then climbing left turn to 4000 direct CGT VORTAC and hold.

D-ATIS	CHICAGO APP CON	O'HARE TOWER	GND CON	(TWR CENTER)
135.4 282.225	119.0 292.125	133.0 348.0	124.125 (TWR NORTH)	121.75 (OBND)
			118.05 (TWR SOUTH)	121.9 (IBND)
			226.675 (ALL TWRS)	

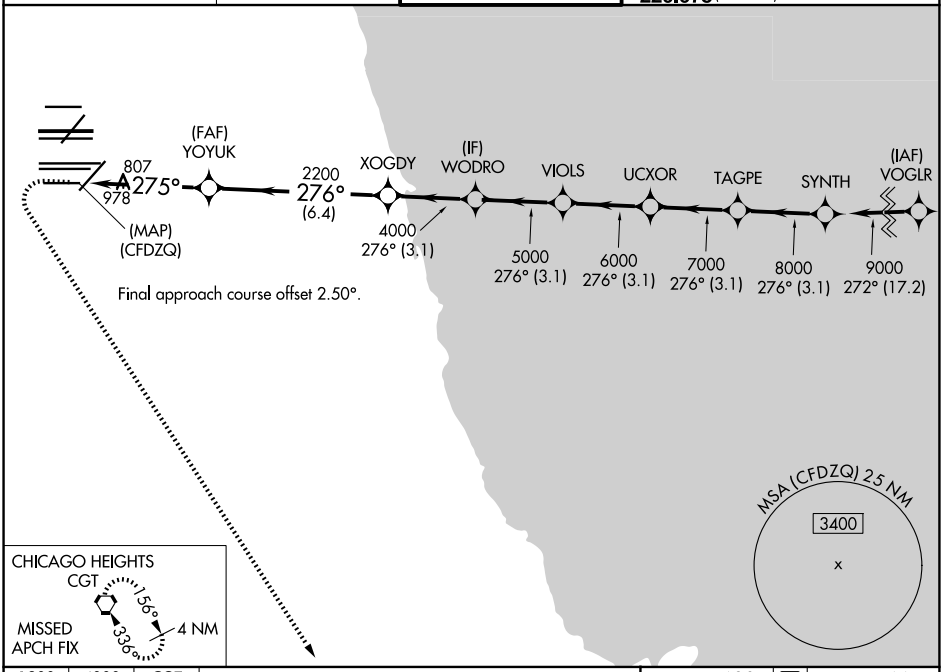

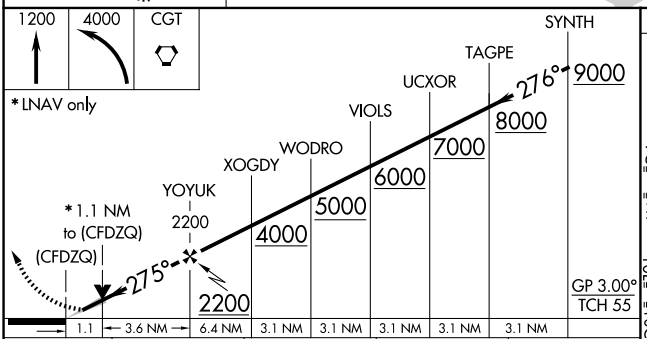

ELEV 680 D TDZE 667

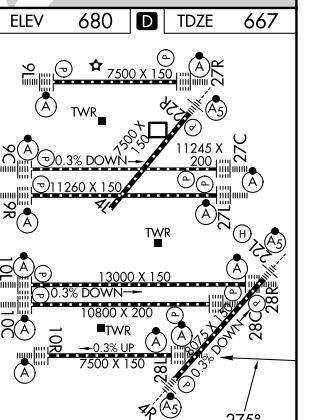

HIRL all rwys
TDZL/RCLS all rwys except 4L

CATEGORY	A	B	C	D
LPV DA	917/24 250 (300-½)			
LNAV/VNAV DA	1090/40 423 (500-¾)			
LNAV MDA	1060/24 393 (400-½)		1060/35 393 (400-⅝)	

EC-3, 29 OCT 2026 to 26 NOV 2026
EC-3, 29 OCT 2026 to 26 NOV 2026