| WAAS | APP CRS | | |
|---|---|---|---|
| CH **99340** | **093°** | Rwy Ldg | **7500** |
| **W10E** | | TDZE | **680** |
| | | Apt Elev | **680** |

# RNAV (GPS) Z RWY 10R


## CHICAGO O'HARE INTL (ORD)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C (-2°F) or above 54°C (130°F). Simultaneous approach authorized. Use of FD or AP providing RNAV track guidance required during simultaneous operations. LNAV procedure NA during simultaneous operations. DME/DME RNP-0.3 NA. For inop ALS, increase LNAV Cat C and D visibility to RVR 6000.


ALSF-2

MISSED APPROACH: Climb to 1200 then climbing right turn to 4000 direct DPA VOR/DME and hold.

| D-ATIS | CHICAGO APP CON | O'HARE TOWER | GND CON | (TWR CENTER) |
|---|---|---|---|---|
| **135.4 282.225** | **119.0 292.125** | **133.0 348.0** | **124.125** (TWR NORTH) | **121.75** (OBND) |
| | | | **118.05** (TWR SOUTH) | **121.9** (IBND) |
| | | | **226.675** (ALL TWRS) | |

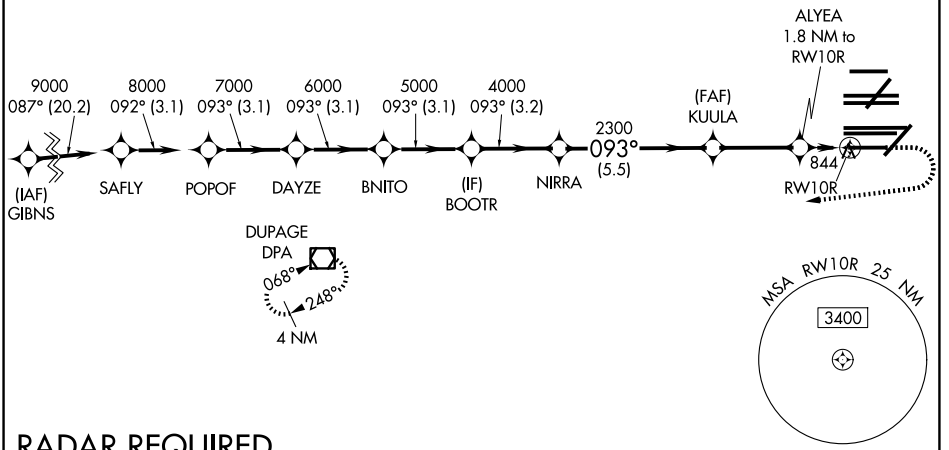



## RADAR REQUIRED

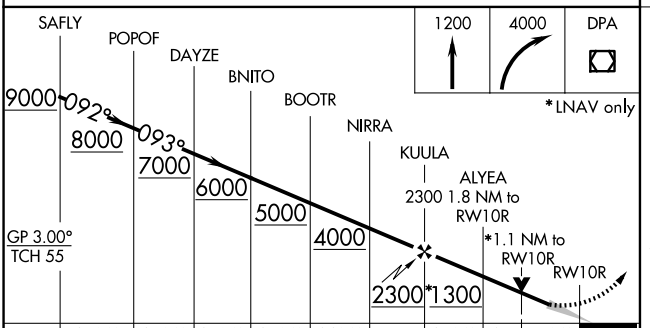


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 881/18 201 (300-½) | | | |
| LNAV/VNAV DA | 1122/50 442 (500-1) | | | |
| LNAV MDA | 1100/24 420 (500-½) | | 1100/40 420 (500-¾) | |

ELEV 680 D TDZE 680

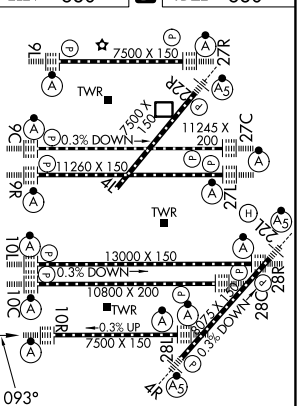


HIRL all rwys
TDZL/RCLS all rwys except 4L



EC-3, 29 OCT 2026 to 26 NOV 2026
EC-3, 29 OCT 2026 to 26 NOV 2026